



RFID label for reliable logistics with 360 degree read angle combined to performance of latest IC generation.


ELECTRICAL SPECIFICATION

- Device type
- RAIN RFID / EPCglobal Gen2v2
- Operational frequency
- Global 865-928MHz
- IC type
- NXP UCODE 8™
- Memory configuration
- EPC 128 bit; TID 96 bit
- Read range (2W ERP)*
- On plastic up to 12 m / 39 ft
- On cardboard up to 10 m / 33 ft
- Applicable surface materials*
- Non-metallic surfaces

* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Different surface materials may have an effect on performance.


TAG POLARIZATION

Confidex Crosswave Neo™ is designed to have a constant reading performance in all orientations even when using linear reader antenna.

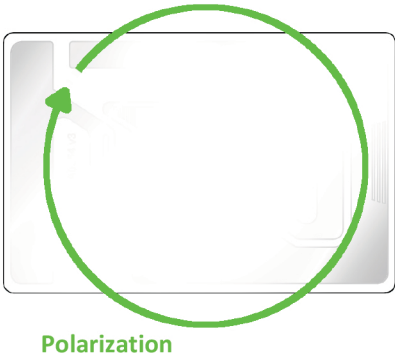

MECHANICAL SPECIFICATION

- Face material
- Printable matt coated paper
- Background adhesive
- General purpose permanent adhesive
- Delivery format
- 4x2": 1000 pcs on reel
- 4x6": 500 pcs on reel
- Pitch on reel
- 4x2": 55,245 mm / 2.175"
- 4x6": 155,6 mm / 6.126"
- Reel core inner diameter
- 76 mm / 3"
- Tag dimensions
- 101,6 x 50,8 mm / 4 x 2"
- 101,6 x 152,4 mm / 4 x 6"

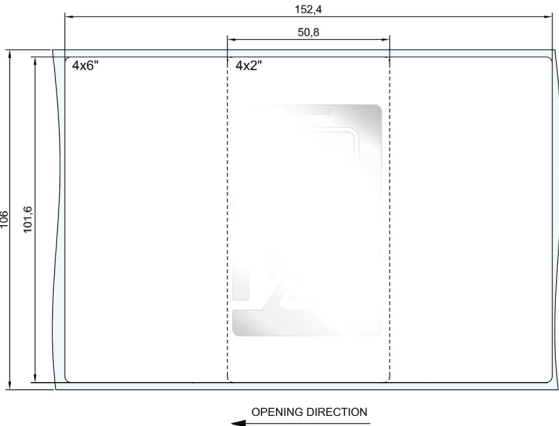

ENVIRONMENTAL RESISTANCE

- Operating temperature
- 35°C to +70°C / -31°F to +158°F
- Ambient temperature
- 35°C to +70°C / -31°F to +158°F
- Storage condition
- 1 year in +20°C / 50% RH (shelf life for adhesive)
- Expected lifetime
- Meant for short term use, in normal operating conditions lifetime can be years.

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

PERSONALIZATION

Pre-encoding

- Customer-specific encoding of EPC memory. Locking permanently or with password.

Customized printing

- Customer-specific layout including logo, text, numbers, barcodes etc.

INSTALLATION INSTRUCTIONS

Ideal installation conditions are +20°C (+68°F) / 50% RH. For exceptional conditions, please contact Confidex. Adhesive of the Confidex Crosswave Neo™ labels will provide best adhesion in 24 hours after the installation. Bond strength can be improved with firm application pressure. Always clean and dry the surface for obtaining the maximum bond strength. Avoid touching the background adhesive.

Minimum bending diameter of the label is defined to be 50mm. Do not bend the label below the limit. Never touch on the IC location. IC is a sensitive electrical component and can be damaged if unexpected pressure is applied on it.

ORDER INFORMATION

Product number: 3004723
Product name: Confidex Crosswave Neo™ 4x2" UCODE 8

Product number: 3004724
Product name: Confidex Crosswave Neo™ 4x6" UCODE 8

For additional IC versions, information and technical support contact Confidex Ltd.

DISCLAIMER
 THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.