

PRODUCT DATASHEET

Confidex Links NFC™ On-metal



Modular NFC on-metal label for high volume applications to any surface material.

ELECTRICAL SPECIFICATION

Device type

NFC Forum Type 2

Air interface protocol

ISO/IEC 14443A

Operational frequency

13,56 MHz

IC type

NXP NTAG213

Option: NXP NTAG216

Option: NXP NTAG210μ

Memory configuration

NTAG213: User memory 144 Bytes

Option: NTAG216: User memory 888 Bytes

Option: NTAG210μ: User memory 48 Bytes

Read range (with NTAG213)*

Mobile phone up to 15 mm

Fixed reader up to 20 mm

Applicable surface materials*

Any surface, including metal

* Read ranges are measured in laboratory environment and there can be some variation in real application. Also used surface material and IC type might affect the read range.

MECHANICAL SPECIFICATION

Tag materials

Printable white synthetic face layer, resin ribbon recommended.

Background adhesive

Permanent adhesive for general purpose use.

Weight

< 1 g

Delivery format

1000 pcs / reel

Pitch on reel


27,71 mm / 1.091 in

Reel core inner diameter

76 mm / 3"

Tag dimensions

25 x 25 x 0,45 mm / 0.98 x 0.98 x 0.018 in

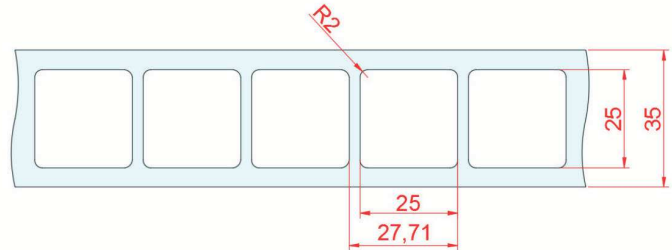

ENVIRONMENTAL RESISTANCE

Operating temperature

-35°C to +85°C / -31°F to +185°F

Ambient temperature

-35°C to +85°C / -31°F to +185°F

Water resistance

Good, tested 5 hours in 1m deep water (IP68)

Chemical resistance

- No physical or performance changes in:
- 168h Salt water (salinity 10%) exposure
 - 24h Sulfuric acid (10%, pH 2) exposure
 - 168h Motor oil exposure
 - 24h NaOH (10%, pH 13) exposure
 - 2h Acetone exposure

Storage condition

1 year in +20°C / 50% RH (shelf life for adhesive)

Expected lifetime

Years in normal operating conditions

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

PERSONALIZATION OPTIONS

Pre-encoding

- Customer specific NDEF encoding

Visual marking

- Variable printing of customer specific content (such as QR-code, Barcode, serial number)
- Color artwork, branding

Please note, that custom printing may impact the product pitch on reel depending on the artwork type.

INSTALLATION INSTRUCTIONS

Ideal installation conditions are +20°C (+68°F) / 50% RH. For exceptional conditions, please contact Confidex. Bond strength can be improved with firm application pressure. Always ensure clean surface for obtaining the maximum bond strength.

During attachment to the identified item, please avoid touching the background adhesive. If the location on the asset needs to be changed, please use a new tag instead of re-placing the used one; the adhesion will suffer from the re-placement.

Minimum bending diameter of the Confidex Links™ on-metal is defined to be 50mm. Do not bend the label above the limit. Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip.

ORDER INFORMATION

Product number: 3001957

Product name: Confidex Links™ NTAG213 on-metal

For additional information and technical, and other product versions, contact Confidex Ltd.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.

