


3.7kW 208/230V Single-Phase Basic PDU - 32 C13 & 6 C19 Outlets, L6-20P Input, 10 ft. Cord, 63.75 in. 0U Rack

MODEL NUMBER: PDUV20HVL6-72

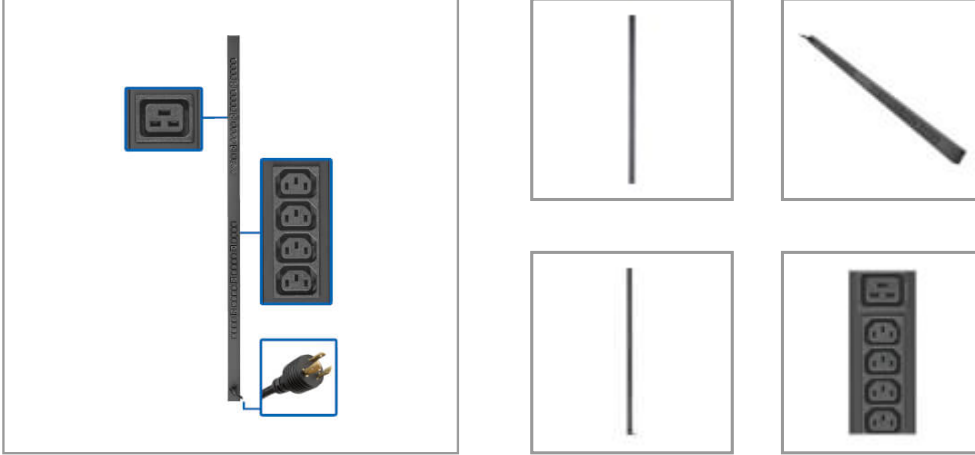

Delivers 208/230V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

Features

Single-Phase 208/230V rack PDU (rPDU) Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDUV20HVL6-72 features 32 C13 and six C19 outlets for connecting equipment. A 10-foot cord with NEMA L6-20P input plug connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads. The switchless design helps prevent an accidental shutdown, which could lead to costly downtime.

Versatile Installation Options Give You Plenty of Choices

The 63.75-inch all-metal housing supports 0U vertical mounting in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting clips and hardware. You may also use the clips to secure the PDU to a wall, counter or other flat, secure surface. Included C20 and C14 plug-lock inserts attach to the connected components' plugs to keep them connected and the devices continuously powered.

Specifications

OVERVIEW	
UPC Code	037332255945
PDU Type	Basic
INPUT	
Input Phase	Single-Phase
PDU Input Voltage	208; 230
Recommended Electrical Service	Single-phase 16/20A 230/208V service

Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 32 C13 and 6 C19 outlets distribute AC power to connected equipment; Compatible with Eaton Tripp Lite power cords.
- Switchless design helps prevent accidental shutdowns that can lead to costly downtime
- 10 ft. cord with NEMA L6-20P single-phase input connects to compatible power source
- 63.75 in. 0U PDU with included mounting hardware installs in rack or under counter

Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

Package Includes

- PDUV20HVL6-72 3.7kW 208/230V Single-Phase Basic PDU
- (38) Plug-lock inserts
- Mounting hardware
- Owner's manual



Powering Business Worldwide

TRIPP LITE
SERIES

Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous
Input Connection Type	NEMA L6-20P
PDU Plug Type	NEMA L6-20P
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	3.7kW (230V), 3.33kW (208V) / 20A total capacity (Agency de-rated 16A); 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	Compatible with Eaton Tripp Lite Power Cords
Output Receptacles	(32) C13; (6) C19
Output Nominal Voltage	208/230V
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Rack Height	0U
Form Factors Supported	0u vertical installation in equipment racks, plus under-counter and wallmount
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	5.00 x 3.00 x 65.50
Shipping Weight (kg)	4.90
Unit Dimensions (hwd / in.)	63.750 x 3.500 x 2.250
Unit Dimensions (hwd / cm)	162 x 5.7 x 9.5
Unit Weight (lbs.)	8
Unit Weight (kg)	3.63
ENVIRONMENTAL	
Operating Temperature Range	32° to 104°F (0° to 40°C)
Storage Temperature Range	-22° to 122°F (-30° to 50°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10000 ft. (0-3000 m)
STANDARDS & COMPLIANCE	
Product Certifications	RETIE (Colombia); NOM (Mexico); UL 60950-1



Powering Business Worldwide

TRIPP LITE
SERIES

Product Compliance	RoHS
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	5-year limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2026 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.