


## 20-Outlet Vertical Power Strip, 120V, 15A, 15 ft. (4.57 m) Cord, 5-15P, 60 in.

MODEL NUMBER: PS6020

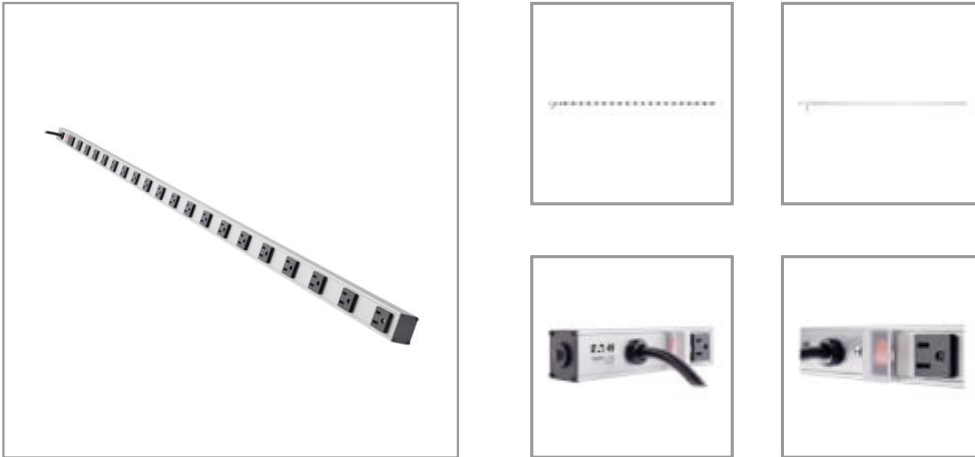

### Highlights

- 20 outlets
- Convenient and safe covered, on/off switch
- 15-amp circuit breaker
- 15-ft. cord
- 60" length

### Package Includes

- PS6020
- Mounting hardware
- Instruction manual

### Features

- Sturdy all-metal 60 inch corded strip format with 2.795 inch center-to-center outlet spacing
- Included mounting hardware
- Includes 20 NEMA 5-15R output receptacles
- Ideal for horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications
- Lighted power switch with locking transparent cover prevents accidental shutoff
- 15 amp electrical capacity with circuit breaker
- 120V AC, 50/60Hz electrical compatibility

## Specifications

| OVERVIEW                           |               |
|------------------------------------|---------------|
| UPC Code                           | 037332011473  |
| INPUT                              |               |
| Nominal Input Voltage(s) Supported | 120V AC       |
| Recommended Electrical Service     | 15A 120V      |
| Input Cord Gauge Type              | 14 gauge; SJT |
| Voltage Compatibility (VAC)        | 120           |
| Input Plug Type                    | NEMA 5-15P    |
| Input Cord Length (ft.)            | 15            |
| Right-Angle Plug                   | No            |
| Input Cord Length (m)              | 4.57          |



Powering Business Worldwide

TRIPP LITE  
SERIES

|  |  |
|--|--|
| Integrated Cord Clip                         | No   |
| <b>OUTPUT</b>                                |  |
| Frequency Compatibility                      | 50 / 60 Hz   |
| Output (Watts)                               | 1800   |
| Output Receptacles                           | (20) 5-15R   |
| Circuit Breaker (amps)                       | 15   |
| Transformer Accommodation                    | (10) Yes   |
| Right-Angle Outlets                          | No   |
| Outlet Spacing                               | 2.795 in.  |
| <b>USER INTERFACE, ALERTS &amp; CONTROLS</b> |  |
| Switches                                     | Lighted 2 position switch controls power to all outlets  |
| Locking Switch Cover                         | Transparent on/off switch cover prevents accidental turn-off   |
| <b>PHYSICAL</b>                              |  |
| Color  | Silver   |
| Material of Construction                     | Aluminum   |
| Power Cord Color                             | Black  |
| Form Factors Supported                       | Supports horizontal or vertical raceway style power distribution in office, workbench, industrial, networking and telecom applications |
| Housing Color                                | Silver   |
| Mounting Holes or Slots                      | No   |
| Outlets Measurement (Center to Center)       | 2.71 in.   |
| Receptacle Color                             | Black  |
| Shipping Dimensions (hwd / in.)              | 3.40 x 2.60 x 64.00  |
| Shipping Dimensions (hwd / cm)               | 8.64 x 6.60 x 162.56   |
| Shipping Weight (lbs.)                       | 4.90   |
| Shipping Weight (kg)                         | 2.22   |
| Unit Dimensions (hwd / in.)                  | 1.750 x 60.000 x 1.250   |
| Unit Dimensions (hwd / cm)                   | 152.4 x 3.8 x 3.8  |
| Unit Weight (lbs.)                           | 5.0  |
| Unit Weight (kg)                             | 2.27   |
| Outlet Spacing                               | 2.795 in.  |
| Mounting Details                             | Includes mounting clips  |
| <b>ENVIRONMENTAL</b>                         |  |
| Operating Temperature Range                  | 32° to 104°F (0° to 40°C)  |



Powering Business Worldwide

TRIPP LITE  
SERIES

|                                      |                                |
|--------------------------------------|--------------------------------|
| Storage Temperature Range            | 14° to 122°F (-10° to 50°C)    |
| Operating Humidity Range             | 10% to 90% RH                  |
| Storage Humidity Range               | 5% to 95% RH                   |
| <b>FEATURES &amp; SPECIFICATIONS</b> |                                |
| Antimicrobial                        | No                             |
| Built-In Circuit Breaker             | Yes                            |
| <b>STANDARDS &amp; COMPLIANCE</b>    |                                |
| Product Certifications               | cUL Listed; UL 1363; UL Listed |
| Product Compliance                   | RoHS                           |
| <b>WARRANTY &amp; SUPPORT</b>        |                                |
| Product Warranty Period (Worldwide)  | Lifetime limited warranty      |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2026 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.