



**keonn**

Retail RFID  
Systems

## **AdvanTrack-600™**

Real-time inventory  
and location system





### Benefits:

- Persistent, accurate, and automated inventory
- Real-time location of items
- Reduction of stock-outs
- Shrinkage reduction
- Higher control of assets

### Applications:

- Retail stores
- Hospitals
- Low height warehouses
- Asset tracking in offices/labs

### Product overview


**AdvanTrack-600** is an overhead RFID-based system that provides real-time inventory and location of all tagged items in a given space. Examples of such spaces are retail stores, small warehouses, hospital areas, etc.

**AdvanTrack-600** achieves very high read rate and provides the location of each RFID tag with an accuracy of 1-2 metres.

Each unit covers an area between 20 m<sup>2</sup> and 60 m<sup>2</sup> depending on the tag density.

**AdvanTrack-600** is very easy and inexpensive to install: it is powered by Power over Ethernet and requires no RF cables.

By providing real time inventory, AdvanTrack-600 allows retailers to increase on shelf availability, sales and customer satisfaction as well as to reduce time and workload of inventory cycle counts. This leads to more satisfied customers and more productive employees.



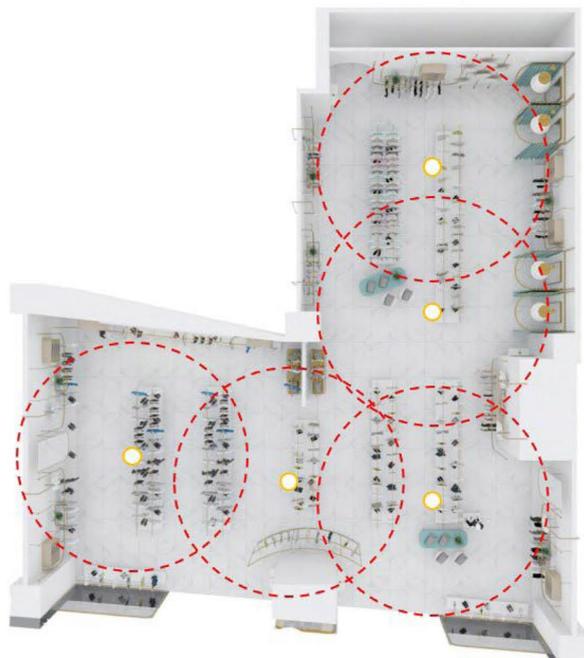




### Technical specifications

Operating Frequency	865 - 928 MHz depending on region or country
RF Power output	Up to 31.5 dBm conducted power Conducted power may need to be reduced to meet regulatory limits
Standard Compliance	EPC Class1 Gen2 UHF (ISO 18000-6C)
Data interface	RJ45 (10/100 Base-T Ethernet)
Power supply	PoE 802.3at Type 1 or Type 2 (same cable as data interface cable)
Temperature range	0°C to +40°C
Power consumption	Idle consumption < 3 W Max consumption (@31.5 dBm) < 14 W
Power supply	Power Over Ethernet (PoE): IEEE 802.3af and 802.3at (Type I & Type II) Power consumption: Class 3 The PSE equipment must supply up to 15.4 W
Data communications	Ethernet: IEEE 802.3 up to 100 Mbps Ethernet over USB (USB mini Type-B connector) (maintenance connection)
LED indicators	LED status (RGB LED)
Temperature	Operating temperature: 0 °C to +40 °C Storage temperature: -10 °C to +60 °C
Dimensions	415mm x 214.5mm
Weight	5.33 kg 11 lb
Module	M7e-TERA

**Mechanical specifications**

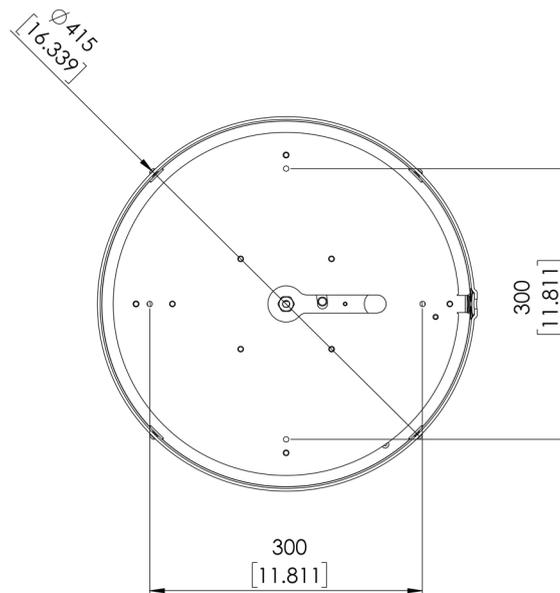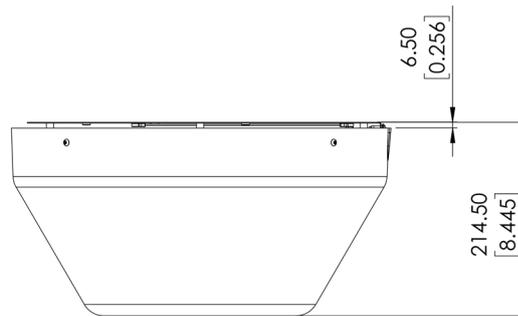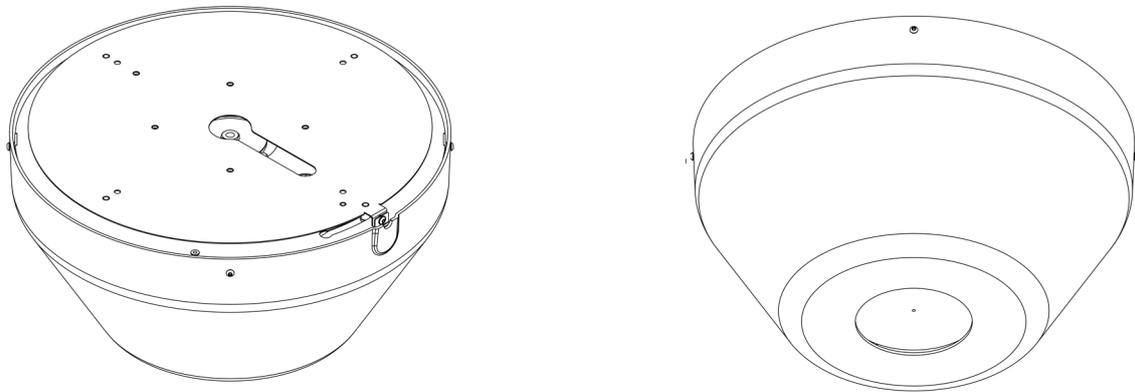

Units in millimeters and [inches]

### Product codes for ordering

ADTR	-	M	-	FF	-	mmm	
							<b>M = model</b>
		SP11-DP-2					SP11-DP-2
							<b>FF = frequency band</b>
				LB			865,6 MHz - 867,6 MHz
				UB			902,0 MHz - 928,0 Mhz
							<b>mmm = series</b>
						600	Model 600

Examples:

#### ADTR-SP11-DP-2-LB-600:

- AdvanTrack
- SP11-DP-2
- LB - Lower frequency band
- Model 600

#### ADTR-SP11-DP-2-UB-600:

- AdvanTrack
- SP11-DP-2
- UB - Upper frequency band
- Model 600



Copyright © Keonn Technologies S.L.  
All rights reserved.

Information in this publication  
supersedes all earlier versions.  
Specifications subject to change  
without notice.

