

## Omni-ID® IQ 400P HT

Omni-ID IQ 400P HT is a high temperature, synthetic RFID hang tag ideally suited for single use applications and capable of surviving temperatures up to 230°C. Optimized for thermal barcode printers, the IQ 400P HT is designed to perform best in applications where the inlay of the tag hangs away from the metallic asset.

### Applications


With its high temperature capability, premium materials, and global frequency, the Omni-ID IQ 400P HT tags are ideally suited to:

- ▶ Manufacturing
- ▶ Automotive paint processes
- ▶ Electronics

### Physical Specifications

Material	High Temperature Synthetic label
Size (mm) (tolerance)	50 x 30 x 0.49 +/-0.5
Size (in) (tolerance)	1.97 x 1.18 x 0.02 +/-0.02
Weight (g)	0.51

### Dimensions

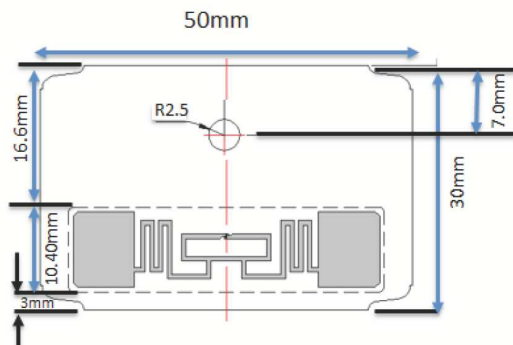

Dimensions stated in mm

Note: See diagram - the 10.40mm inlay area must hang away from metal. Placing the inlay over metal will result in performance deterioration.


### RF Specifications

Protocol	EPC Class 1 Gen2
Frequency Range (MHz)	860-960 (global)
Read Range (Fixed reader) <sup>1</sup>	Up to 4.0 m (13.1ft)
Read Range (Handheld reader) <sup>1</sup>	Up to 2.0 m (6.5ft)
Material Compatibility	Plastic and non metallic substrates.
IC Type (chip)	Alien Higgs 3
Memory <sup>2</sup>	EPC - 96bits User - 512bits Unique TID - 64bits

1. Quoted performance achieved using standard testing methodology. Read range will vary with reader hardware and output power.  
2. EPC and User memory are reprogrammable, UTID is locked at point of manufacture.

### Radiation Patterns

#### Off Metal

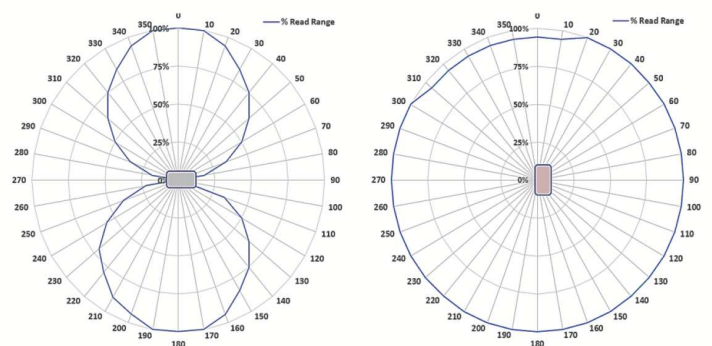

## Related Products and Services

- ▶ **Omni-ID IQ 800P HT** - High temperature global hang tag capable of surviving temperatures to 230°C and optimized for thermal printers.
- ▶ **Omni-ID Exo 400**- Small high temperature RFID tag designed with rugged encapsulation for harsh environments, capable of surviving temperatures to 235°C.
- ▶ **Service Bureau** - Omni-ID offers a full service bureau for printing and pre-encoding Omni-ID tags at point of manufacture.



## Environmental Specifications

Operating Temperature	-40 to +85°C
Max Temperature Exposure	-40 to +230°C
IP Rating	IP68
Shock and Vibration	MIL STD 810-G
Attachment	Holes provided for mechanical attachment
Certifications	RoHS approved CE approved ATEX/IECEX certified (option) US & Canada [C1D1/D2] certified (option)
Warranty	1 year

## Ordering Information

Order code	166 – GS
Order Options	:303 (Customization) :304 (ATEX/IECEX certified) :307 (US & Canada [C1D1/D2 certified]) :701 (Standard Service Bureau) <sup>1</sup>
Minimum Order Quantity	1 roll (1020 pcs, includes 2% oversupply)

