


On-Metal ETSI White Wet Inlay
 EPC Class 1 Gen 2, ISO 18 000-6C
 Impinj Monza 4QT
 Sales code 3006387

Mechanical dimensions

A1 x A2	Antenna size	95 x 40 mm	± 0,5 mm	3,740 x 1,575 in
B1 x B2	Die-cut size	98 x 43 mm	± 0,2 mm	3,858 x 1,693 in
C	Web width	102 mm	± 0,5 mm	4,016 in
D	Pitch, length per piece MD	47 mm	± 1,5 mm	1,850 in
E	Die-cut to web edge	2 mm	± 1,5 mm	0,079 in
	Overall thickness of the transponder package (excluding IC and siliconized paper)	635 µm	± 10 %	
U	Die-cut corner radius	1 mm		0,039 in

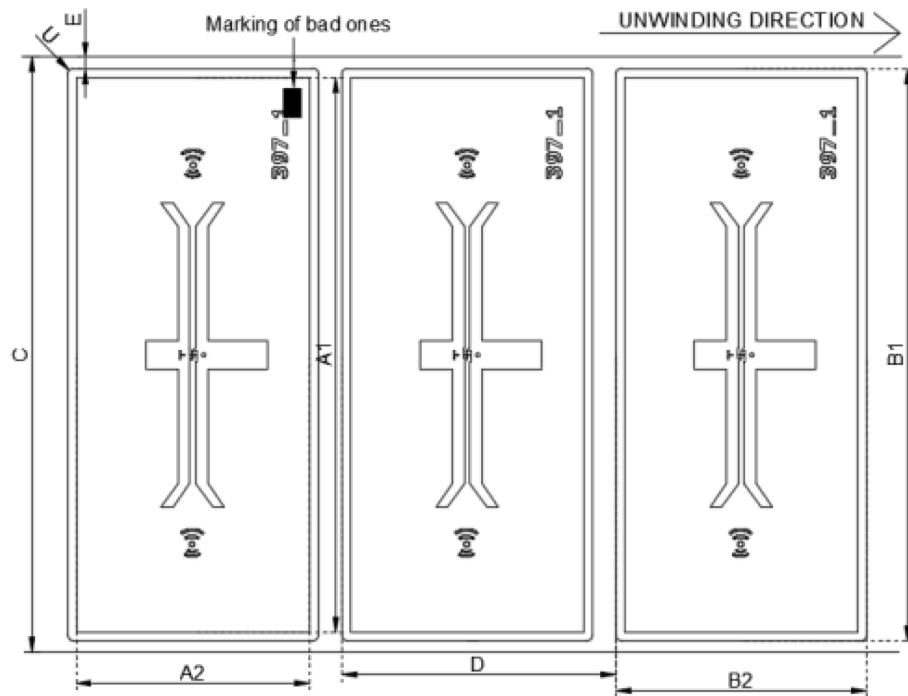

Electrical characteristics

Integrated Circuit (IC)	Impinj Monza 4QT
Air interface protocol	EPC Class 1 Gen 2, ISO 18 000-6C
Operation frequency	ETSI
Memory	128 bit EPC + 512 bit


General characteristics of transponder

Operating temperature (electronics parts)	-40 °C / +85 °C	-40 °F / 185 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	White PET 50	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-25	
- labelling temperature	min. +10 °C	min. 50 °F
- usage temperature	-40 °C - 93 °C	-40 °F - 199,4 °F
- peel	min. 19.5 N / 25 mm (FTM 2)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	95 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	

Structure

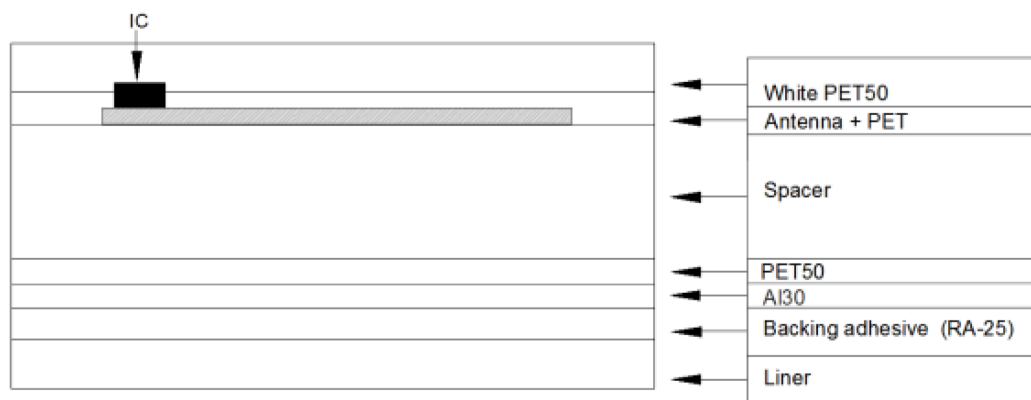

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Winding of the reel	Face out
Package size	500 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

Products classified as CES samples have the released for production (RFP) product's form factor, RF performance and IC functionality. CES samples represent the RFP products in most aspects. CES samples are delivered without any warranty. During the CES phase, SMARTRAC reserves the right to modify product specifications without notice.

This technical specification replaces all earlier ones.

Version	1
Update date	23 January 2017
Author	SMARTRAC / KTolonen
Approved	SMARTRAC / 23.1.2017 k734581



 atlasRFIDstore.com
1.888.238.1155 • Inside USA
1.205.383.2244 • Outside USA
info@atlasRFIDstore.com • www.atlasRFIDstore.com