

AD Web M750

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

Impinj M750

Antenna Dimensions

50 x 30 mm / 1.97 x 1.18 in

International Standard

ISO/IEC 18000-63, EPC Gen2 V2

Industry Segments

Apparel
Automotive
Logistics

Applications

Home Essentials
Inventory and Logistics
Supply Chain Management

RoHS

EU Directive 2011/65/EC and
Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



Item-level tags condensed to the max

AD Web M750 inlays and tags are designed for the unique identification of items such as apparel and electronics. They are especially suited to item-level retail, logistics and supply-chain applications.

Avery Dennison's new M700-based inlays are compact and ideally shaped for apparel hang tags providing high read reliability, excellent performance even when stacked in close proximity, and best-in-class orientation sensitivity, with low total applied costs.

Web inlays with the Impinj M700 series IC, when used in retail applications, are included on the approved inlay list by the ARC RFID Research Center of the University of Auburn, and comply with categories F, G, I, K, M, N,L, J, Q, W1, W2, W3, W4, W5 and W6.

AD Web M700 products are available with the Impinj M730 and M750 ICs. The Impinj M730 IC has 128-bit EPC memory, and the Impinj M750 IC has both 96-bit EPC memory and 32-bit user memory. Both Impinj ICs are compatible with the global GS1 UHF Gen2v2 standard, which ISO/IEC standardized as 18000-63.


AD Web M750 inlays are available as of now. Delivery formats include dry, wet and label inlays.

Avery Dennison inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, especially in the retail environment.


Technical features

Chip	Impinj M750		
EPC and User Memory	96-bit and 32-bit		
TID Memory	96-bit / 48-bit unique serial number		
Product Code	3007842	3007843	3007896
Delivery Format	Dry inlay	Wet inlay	Label
Die-Cut Dimension	–	54 x 33 mm / 2.13 x 1.30 in	54 x 37 mm / 2.13 x 1.45 in
Inlay Substrate	PET	PET	PET
Face Sheet	Clear PET	Clear PET	Mid-gloss paper
Inlay Liner Material	-	Siliconized paper	Siliconized paper
Standard Pitch	36 mm / 1.42 in	36 mm / 1.42 in	36 mm / 1.42 in
Web Width	60 mm / 2.4 in	60 mm / 2.4 in	60 mm / 2.4 in
Core Size	76 mm / 3 in	76 mm / 3 in	76 mm / 3 in
Quantity / Reel	25,000 pcs/reel 50,000 pcs/box	15,000 pcs/reel 45,000 pcs/box	3,000 pcs/reel 9,000 pcs/box
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F		

Orientation sensitivity

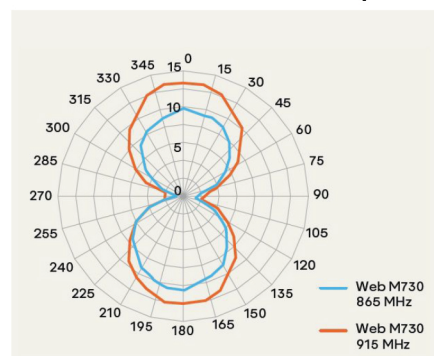

Read range

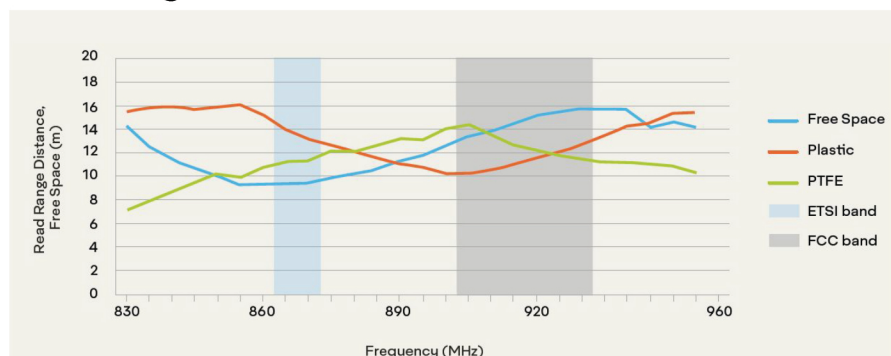

All graphs are indicative: performance in real life applications may vary.



© 2022 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: [rfid.averydennison.com/termsandconditions](https://www.averydennison.com/termsandconditions)

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

