

EOS-261 M730

# T A G E O S

## Datasheet

### Small, Performant, and Versatile Solution for Retail and Beyond

The EOS-261 M730 inlay combines stable, high performance on various materials with a remarkably small footprint. This qualifies it as the market's smallest inlay to meet ARC specifications W1 to W6 (as of May 2022).

Hence, EOS-261 M730 is the solution of choice for multiple item-level applications in retail (particularly apparel, accessories, consumer electronics, home goods, and toys), logistics, automotive and industrial manufacturing.

Equipped with 128-bit EPC memory, the Impinj M730 RAIN RFID chip provides high performance, fast inventory capability, and advanced features for next-generation, universal RAIN RFID tags. It lends itself to solutions that include high-speed inventory counting, loss prevention with frictionless self-checkout, and embedded tagging with seamless product returns.



## T A G E O S

It is available in dry, wet, and paper-face delivery formats.

Tageos was one of the first companies to qualify for ARC Quality Certification for its manufacturing operations from Auburn University RFID Lab. EOS-261 M730 complies with ARC specifications F, G, N, O, Q, R, Y, and W1 to W6.

Like all Tageos' RFID products, it complies with ISO 9001:2015 Quality Management System and ISO 14001:2015 Environmental Management System, as well as Environmental Directives RoHS and REACH, utilizing sustainable materials such as FSC® certified paper whenever possible.


### Overview

IC:	Impinj M730
EPC/User Memory:	128 bit / - bit
TID Memory:	96 bit incl. 48 bit unique S/N
Frequency Band:	860 - 960 MHz
Protocol:	EPC Class 1 Gen 2 ISO 18000-6c

### Application Areas

- Apparel
- Consumer Electronics
- Inventory Visibility
- Item Level Tagging
- Supply Chain Management



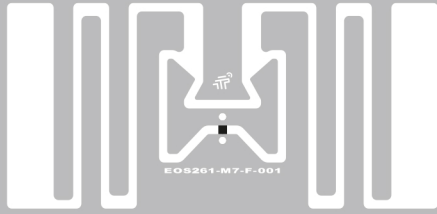


EOS-261 M730

# T A G E O S

## Technical Overview

	Dry Inlay	Wet Inlay	Paper-face Inlay
Product Code	2600000046	2600000047	2600000048
Antenna Size	44 x 20 mm 1.73 x 0.79 in	44 x 20 mm 1.73 x 0.79 in	44 x 20 mm 1.73 x 0.79 in
Finish Size	-	47 x 23 mm 1.85 x 0.91 in	47 x 23 mm 1.85 x 0.91 in
Web Width	50.0 ± 1 mm 1.969 ± 0.04 in	50.0 ± 1 mm 1.969 ± 0.04 in	50.0 ± 1 mm 1.969 ± 0.04 in
Pitch	26.04 ± 0.2 mm 1.025 x 0.01 in	26.04 ± 1 mm 1.025 x 0.04 in	26.04 ± 1 mm 1.025 x 0.04 in
Antenna Material	Aluminium	Aluminium	Aluminium
Front Face	-	Clear PET	TT Paper
Inlay Substrate	Clear PET	Clear PET	Clear PET
Inlay Adhesive	-	Permanent	Permanent
Liner	-	Paper	Paper
Operating Temperature	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F
Final Inspection	100% tested	100% tested	100% tested
ARC Approvals	F, G, N, O, Q, R, Y W1, W2, W3, W4, W5, W6	F, G, N, O, Q, R, Y W1, W2, W3, W4, W5, W6	F, G, N, O, Q, R, Y W1, W2, W3, W4, W5, W6

Read Range

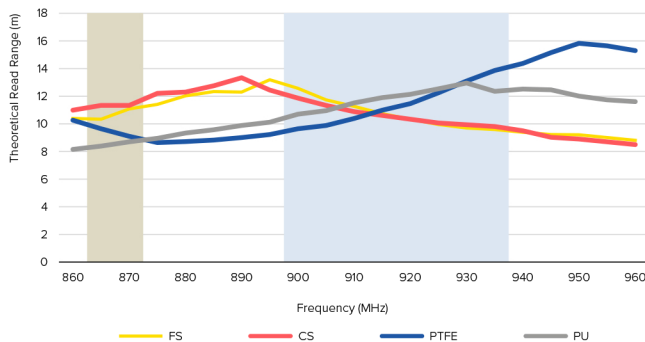

**Graphs:** All the graphs are indicative; performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2023 Tageos. All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.