



EOS-450 M730

T A G E O S

## Datasheet



T A G E O S

### Versatile and High-Performance Solution for Retail and Beyond

EOS-450 M730 Global inlay combines moderate size with outstanding robust performance on a wide range of surfaces. Based on a design targeted for the challenging ARC Spec Z approval, this inlay is the product of choice for a wide range of applications such as retail, food and quick service restaurants, as well as logistics and general industrial segments. Hence, it is ideally suited for inventory visibility and item-level tagging.

Equipped with 128-bit EPC memory, the Impinj M730 RAIN RFID chip provides high performance, fast inventory capability, and advanced features for next-generation, universal RAIN RFID tags. It lends itself to solutions that include high-speed inventory counting, loss prevention with frictionless self-checkout, and embedded tagging with seamless product returns.

EOS-450 M730 complies with global frequency standards and is available in dry and wet and paper-face formats.

Tageos was one of the first companies to qualify for ARC Quality Certification for its manufacturing operations from Auburn University RFID Lab. EOS-450 M730 complies with ARC specification F, G, I, J, K, L, N, O, Q, R, Y and Z, as well as W1, W2, W3, W4, W5, and W6.

Like all Tageos' RFID products, it complies with ISO 9001:2015 Quality Management System and ISO 14001:2015 Environmental Management System, as well as Environmental Directives RoHS and REACH, utilizing sustainable materials such as FSC® certified paper whenever possible.

#### Overview

IC:	Impinj M730
EPC/User Memory:	128 / - bit
TID Memory:	96-bit / 48-bit unique S/N
Frequency Band:	860 - 960 MHz
Protocol:	EPC Class 1 Gen 2 ISO 18000-6c

#### Application Areas

- Apparel
- Inventory Visibility
- Item Level Tagging
- Logistics
- Supply Chain Management
- Quick Service Restaurants






# EOS-450 M730

# TAGEOS

## Technical Overview

	Dry Inlay	Wet Inlay	Paper-face Inlay
Product Code	4500000004	4500000001	4500000002
Antenna Size	72 x 10 mm 2.83 x 0.39 in	72 x 10 mm 2.83 x 0.39 in	72 x 10 mm 2.83 x 0.39 in
Finish Size	- -	75 x 13 mm 2.95 x 0.51 in	75 x 13 mm 2.95 x 0.51 in
Web Width	82 ± 1 mm 3.23 ± 0.04 in	82 ± 1 mm 3.23 ± 0.04 in	82 ± 1 mm 3.23 ± 0.04 in
Pitch	16 ± 0.2 mm 0.63 ± 0.001 in	16 ± 0.2 mm 0.63 ± 0.001 in	16 ± 0.2 mm 0.63 ± 0.001 in
Antenna Material	Aluminium	Aluminium	Aluminium
Front Face	-	Clear PET	TT Paper
Inlay Substrate	Clear PET	Clear PET	Clear PET
Inlay Adhesive	-	Permanent	Permanent
Liner	-	Paper	Paper
Operating Temperature	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F
Final Inspection	100% tested	100% tested	100% tested
ARC Approvals	F, G, I, J, K, L, N, O, Q, R, Y, Z W1, W2, W3, W4, W5, W6	F, G, I, J, K, L, N, O, Q, R, Y, Z W1, W2, W3, W4, W5, W6	F, G, I, J, K, L, N, O, Q, R, Y, Z W1, W2, W3, W4, W5, W6

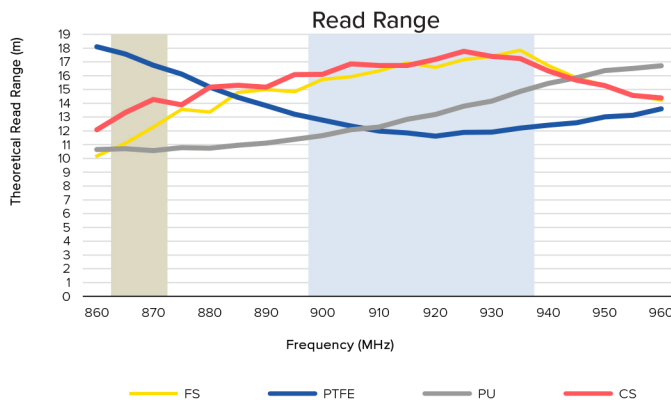

**RoHS**  
compliant



**Graphs:** All the graphs are indicative; performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2023 Tageos. All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

27/03/2023

1 (888) 238-1155 Inside USA • 1 (205) 383-2244 Outside USA  
info@atlasRFIDstore.com • www.atlasRFIDstore.com

atlasRFIDstore.com