

Product Guide

Embeddable
 Global Frequency
 High Temp
 Autoclavable
 User Memory
 Long Range

Series	MICRO series - high temp					XS series - world smallest		
Product								
	MICRO Industrial	MICRO Paint Shop	MICRO Autoclavable	MICRO Power	MICRO Heat	XS Dash	XS Dot	XS Wedge
Part Number (P/N)	X1130-US100-U8 (US) X1130-EU100-U8 (EU)	X1130-US130-U8 (US) X1130-EU130-U8 (EU)	X1130-US140-U8 (US) X1130-EU140-U8 (EU)	X1130-US140-U8 (US) X1130-EU140-U8 (EU)	X1220-US050-H4 (US) X1220-EU050-H4 (EU)	X4101-US000-U8 (US) X4101-EU000-U8 (EU)	X4102-US000-U8 (US) X4102-EU000-U8 (EU)	X4202-US100-H3 (US) X4202-EU100-H3 (EU)
User memory version	X1130-US100-H9 (US) X1130-EU100-H9 (EU)	X1130-US130-H9 (US) X1130-EU130-H9 (EU)	X1130-US140-H9 (US) X1130-EU140-H9 (EU)	X3130-US101-M750 (US) X3130-EU101-M750 (EU)	X1220-US050-H4 (US) X1220-EU050-H4 (EU)	X4101-US000-H3 (US) X4101-EU000-H3 (EU)	X4102-US000-H3 (US) X4102-EU000-H3 (EU)	X4202-US100-H3 (US) X4202-EU100-H3 (EU)
Operating frequency	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)
IC type	NXP UCODE8 Alien Higgs-9	NXP UCODE8 Alien Higgs-9	NXP UCODE8 Alien Higgs-9	Impinj M750	Alien Higgs-4	NXP UCODE8 Alien Higgs-3	NXP UCODE8 Alien Higgs-3	Alien Higgs-3
Memory configuration	96 bits TID 128 bits EPC 686 bits User Mem (opt)	96 bits TID 128 bits EPC 686 bits User Mem (opt)	96 bits TID 128 bits EPC 686 bits User Mem (opt)	96 bits TID 96 bits EPC 32 bits User Memory	64 bits TID 128 bits EPC 128 bits User Memory	96 bits TID 128 bits EPC 512 bits User Mem (opt)	96 bits TID 128 bits EPC 512 bits User Mem (opt)	64 bits TID 96/480 bits EPC 512 bits User Memory
Read range on metal (2W EIRP)	Up to 33 ft (10 m)	Up to 33 ft (10 m)	Up to 33 ft (10 m)	Up to 11.5 ft (3.5 m)	Up to 23 ft (7 m)	Up to 6.6 ft (2 m)	Up to 5 ft (1.5 m)	Up to 3.3 ft (1 m)
Read range off metal	Limited	Limited	Limited	Limited	Limited	Limited	Limited	Limited
Case material	Engineering grade nylon polymer	Engineering grade nylon polymer	Engineering grade nylon polymer, Silicone sealer	Engineering grade nylon polymer	High-temperature polymer	Ceramic	Ceramic	High-performance engineering polymer
Mounting system	Screws (Rivet hole, M3) Pop rivets (Max size 3.2mm) Industrial Adhesive (optional)	Screws (Rivet hole, M3) Pop rivets (Max size 3.2mm) Industrial Adhesive (optional)	Screws (Rivet hole, M3) Pop rivets (Max size 3.2mm)	Screws (Rivet hole, M3) Pop rivets (Max size 3.2mm) Cable tie Industrial Adhesive (optional)	Screws (Rivet hole, M3) High performance adhesive	Epoxy	Epoxy	Embeddable
Operating temperature	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +150°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)
Application temperature	-40°F to +482°F (-40°C to +250°C)	-40°F to +482°F (-40°C to +250°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-55°C to +200°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-40°C to +150°C)	-58°F to +428°F (-50°C to +220°C)
Compression strength	181 psi (1,250 kPa)	181 psi (1,250 kPa)	181 psi (1,250 kPa)	181 psi (1,250 kPa)	725 psi (5,000 kPa)	790 psi (5,447kPa)	790 psi (5,447kPa)	10,100psi (70 MPa)
IP	IP68	IP68	IP69K	IP68	IP68	IP68	IP68	IP68
Dimensions	2.16 x 1.43 x 0.30 in (55x 36.2x 7.5 mm)	2.16 x 1.43 x 0.30 in (55x 36.2x 7.5 mm)	2.16 x 1.43 x 0.30 in (55x 36.2x 7.5 mm)	1.25 x 0.43 x 0.24 in (32 x 10.8 x 6.0mm)	1.65x 0.59 x 0.09 in (42.0 x 15.0 x 2.1 mm)	0.48 x 0.12 x 0.09 in (12.3 x 3 x 2.2 mm)	ø 0.24 x 0.1 in (ø 6 x 2.5 mm)	ø 0.405 x 0.181 in (ø 10.3 x 4.6mm)
Weight	0.92 oz (26 g)	0.92 oz (26 g)	0.92 oz (26 g)	0.1 oz (3 g)	0.08 oz (2.2 g)	0.016 oz (0.44 g)	0.012 oz (0.34 g)	0.28 oz (8 g)
Suggested applications	Work-In-Process High-Temp Production Automotive Assembly RTI Management	Paint Shop Skids Chemical Pre-Treatments Cataphoresis Coating High-Temp Drying Ovens Powder Coating	Autoclave Sterilization Surgical Trays Medical Devices Healthcare Equipment Chemical Cleaning	Power Tool Tracking Automotive Post-Paint Processes Construction Tools Audio-Video Equipment Rental Fleet Management RTI Management	WIP conveying equipment, post-paint oven baking, High temperature environment	Hand Tools and Equipments Automated Tool Tracking Active FOD Prevention	Hand Tools and Equipments Automated Tool Tracking Active FOD Prevention	Onshore and Offshore pipes Heavy equipment and tools Automotive manufacturing Industrial molds

Product Guide

Embeddable
 Global Frequency
 High Temp
 Autoclavable
 User Memory
 Long Range

Series	PICO series- small				ROSWELL series - extra strong			
Product	 Pico On	 Pico In	 Pico Plus	 Nano Plus	 Roswell Autoclavable	 Roswell	 Xplorer Surface	 Xplorer Downhole
Part Number (P/N)	X3110-US001-U8 (US) X3110-EU001-U8 (EU)	X3110-US101-U8 (US) X3110-EU101-U8 (EU)		X1120-US101-U8 (US) X1120-EU101-U8 (EU)				
User memory version	X3110-US001-H3 (US) X3110-EU001-H3 (EU)	X3110-US101-H3 (US) X3110-EU101-H3 (EU)	X3110-US101-H3 (US) X3110-EU101-H3 (EU)	X1120-US101-H3 (US) X1120-EU101-H3 (EU)	X1114-US143-H3 (US) X1114-EU143-H3 (EU)	X1114-US101-H3 (US) X1114-EU101-H3 (EU)	X1115-US111-H3 (US) X1115-EU111-H3 (EU)	X1115-US101-H3 (US) X1115-EU101-H3 (EU)
Operating frequency	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928MHz (US) 865-868MHz (EU)	902-928MHz (US) 865-868MHz (EU)
IC type	NXP UCODE8 Alien Higgs-3	NXP UCODE8 Alien Higgs-3	Alien Higgs-3	NXP UCODE8 Alien Higgs-3	Alien Higgs-3	Alien Higgs-3	Alien Higgs-3	Alien Higgs-3
Memory configuration	96 bits TID 128 bits EPC 686 bits User Mem (opt)	96 bits TID 128 bits EPC 686 bits User Mem (opt)	64 bits TID 96/480 bits EPC 512 bits User Memory	96 bits TID 128 bits EPC 686 bits User Mem (opt)	64 bits TID 96/480 bits EPC 512 bits User Memory	64 bits TID 96/480 bits EPC 512 bits User Memory	64 bits TID 96/480 bits EPC 512 bits User Memory	64 bits TID 96/480 bits EPC 512 bits User Memory
Read range on metal (2W EIRP)	Up to 10 ft (3 m)	Up to 6.6 ft (2m) when embedded	Up to 10 ft (3 m)	Up to 20 ft (6 m)	Up to 16.4 ft (5 m)	Up to 16.4 ft (5 m)	Up to 5 ft (1.5m) when embedded	Up to 5 ft (1.5m) when embedded
Read range off metal (2W EIRP)	Limited	Limited	Limited	Limited	Limited	Limited	Limited	Limited
Case material	Engineering grade nylon polymer/ Ceramic	Ceramic	Engineering grade nylon polymer/ Ceramic	Engineering grade nylon polymer	Stainless steel	Aluminum	Stainless steel	Stainless steel
Mounting system	High-performance adhesive	Epoxy, embeddable	High-performance adhesive	High-performance adhesive	Welding, cable tie, rivet hole ø 0.19 in (ø 5 mm)	Welding, cable tie, rivet hole ø 0.19 in (ø 5 mm)	Embeddable	Embeddable
Operating temperature	-22°F to +185°F (-30°C to +85°C)	-22°F to +185°F (-30°C to +85°C)	-22°F to +185°F (-30°C to +85°C)	-22°F to +185°F (-30°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)
Application temperature	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +302°F (-40°C to +150°C)	-40°F to +482°F (-40°C to +250°C)	-40°F to +482°F (-40°C to +250°C)	-58°F to +482°F (-50°C to +250°C)	-58°F to +482°F (-50°C to +250°C)
Compression strength	170 psi (1,176 kPa)	Packaging dependent	174 psi (1,200 kPa)	166.8 psi (1,150 kPa)	1,145 psi (7,900 kPa)	115 psi (793 kPa)	30,000 psi (206 MPa)	30,000 psi (206 MPa)
IP	IP68	IP68	IP68	IP68	IP68	IP68	IP69K	IP69K
Dimensions	0.5 x 0.28 x 0.12 in (12.8x 7.08 x 3.08 mm)	0.5 x 0.28 x 0.12 in (12.8 x 7.08 x 3.08 mm)	0.70 x 0.43 x 0.2 in (17.7 x 10.9 x 5 mm)	1.25 x 0.51 x 0.20 in (31.7 x 12.8 x 4.8 mm)	1.89 x 1.10 x 0.53 in (48 x 28 x 13.5 mm)	1.89 x 1.10 x 0.53 in (48 x 28 x 13.5 mm)	ø 1.11 x 0.33 in (ø 28.3 x 8.5 mm)	ø 1.11 x 0.33 in (ø 28.3 x 8.5 mm)
Weight	0.05oz (1.4g)	0.05 oz (1.4 g)	0.07 oz (2 g)	0.18 oz (5 g)	1.55 oz (44 g)	0.74 oz (21 g)	0.89 oz (25.4 g)	0.89 oz (25.4 g)
Suggested applications	Manufacturing Hand Tools and Equipments MRO Tool Tracking Military Equipments Tracking Warehouse Automation	Hand Tools and Equipments Oil Wells Equipments MRO Tool Tracking	Manufacturing Hand Tools and Equipments MRO Tool Tracking Military Equipments Tracking Warehouse Automation	MRO Tool Tracking Manufacturing WIP IT Asset Management	Sterilizable surgical trays Medical devices Oil & Gas Valve / Wellhead Management Food Processing Plants Automotive Manufacturing	Sterilizable surgical trays Medical devices Oil & Gas Valve / Wellhead Management Food Processing Plants Automotive Manufacturing	Yard Management for Oil and Gas pipes Pipe maintenance Heavy equipment in Mining Building sites in Construction High-pressure ovens in Manufacturing	Onshore and Offshore Oil Pipes Management Downhole Assets Tracking

Product Guide

Embeddable

Global Frequency

High Temp

Autoclavable

User Memory

Long Range

Series	OUTDOOR series - long range				TRAK series - cost effective			
Product	Container Outdoor	Cargo Outdoor	RTI Outdoor	Flex Outdoor	Versa Trak	Data Trak II	Global Trak	Slim Trak
P/N	X0360-US100-R6P (US) X0360-EU100-R6P (EU)	X03A3-US100-M750 (US) X03A3-EU100-M750 (EU)	X0352-US100-R6P (US) X0352-EU100-R6P (EU)	X0370-GL100-H3 (Global)	X0350-GL011-M750 (Global)	X0330-GL011-M750 (Global)	X0340-GL011-M750 (Global)	X0330-GL001-U8 (Global)
Operating frequency	902-928MHz (US) 865-868MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz (US) 865-868 MHz (EU)	860-960MHz(Global)	860-960 MHz (Global)	860-960 MHz (Global)	860-960 MHz (Global)	860-960 MHz (Global)
IC type	Impinj Monza R6-P	Impinj M750	Impinj R6-P	Alien Higgs-3	Impinj M750	Impinj M750	Impinj M750	NXP UCODE 8
Memory configuration	48 bits TID 128/96 bits EPC 32/64 bits User Memory	96 bits TID 96 bits EPC 32 bits User Memory	48 bits TID 128/96 bits EPC 32/64 bits User Memory	64 bits TID 96/480 bits EPC 512 bits User Memory	96 bits TID 96 bits EPC 32 bits User Memory	96 bits TID 96 bits EPC 32 bits User Memory	96 bits TID 96 bits EPC 32 bits User Memory	96 bits TID 128 bits EPC
Read range on metal (2W EIRP)	Up to 65 ft (20 m)	Up to 39 ft (12 m)	Up to 39 ft (12 m)	Limited	Up to 26 ft (9 m)	Up to 14.8 ft (4.5 m)	Up to 14.8 ft (4.5 m)	Up to 6.5 ft (2 m)
Read range off metal (2W EIRP)	Up to 39 ft (15 m)	Up to 20 ft (6 m)	Up to 13 ft (4 m)	Up to 24.6 ft (7.5 m)	Up to 13 ft (3 m)	Up to 6 ft (2 m)	Up to 6 ft (2 m)	Up to 4.9 ft (1.5 m)
Case material	Industry-Grade Polymer	Industry-Grade Polymer with metal inserts	Industry-Grade Polymer	High-Elasticity Polymer	Industry-Grade Polymer	Polycarbonate	Polycarbonate	Flame-Resistant Glass-Reinforced Epoxy Laminate
Mounting system	Screws, Rivets (ø 1/4" M6), Zip ties, Cable ties, High-performance adhesive (optional)	Screws, Rivets (ø 3.2mm), Zip ties, Cable ties, High-performance adhesive (optional)	Screws, Rivets (ø 0.14 in / 3.5 mm), Zip ties, Cable ties, High-performance adhesive (optional)	Zip ties, Cable ties	High-performance adhesive	High-performance adhesive, Tethering (ø 0.10 in / 2.6 mm)	High-performance adhesive, Tethering (ø 0.10 in / 2.6 mm)	High-performance adhesive, Epoxy (optional)
Operating temperature	-40°F to +158°F (-40°C to +70°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +167°F (-40°C to +75°C)	-40°F to +212°F (-40°C to +100°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to 185°F (-40°C to +85°C)
Application temperature	-40°F to +158°F (-40°C to +70°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +167°F (-40°C to +75°C)	-40°F to +212°F (-40°C to +100°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +302°F (-40°C to +150°C)
Compression strength	29 psi (200 kPa)	29 psi (200 kPa)	26.1 psi (180 kPa)	725psi (5,000 kPa)	26.1 psi (180 kPa)	14.5 psi (100 kPa)	14.5 psi (100 kPa)	106 psi (731 kPa)
IP	IP68	IP68	IP68	IP68	IP68	IP54	IP54	IP68
Dimensions	5.46x 4.99 x 0.47 in (138.8 x42 x12 mm)	3.94 x 1.02 x 0.35 in (100 x 26 x 8.9 mm)	2.88 x 0.9 x 0.33 in (73.3 x 22.8 x 8.3 mm)	3.54 x 0.7 x 0.16 in (90 x 18 x 4.0 mm)	1.98 x 0.67 x 0.21 in (50.3 x 17 x 5.3 mm)	1.50 x 0.51 x 0.16 in (38 x 13 x 4 mm)	1.50 x 0.51x0.16 in (38 x 13 x 4 mm)	2.22x 0.234 x 0.051 in (56.5 x 5.95 x 1.3 mm)
Weight	1.45 oz (41 g)	0.68 oz (19.4 g)	0.39 oz (11 g)	0.28 oz (8 g)	0.11 oz (3 g)	0.08 oz (2.4 g)	0.09 oz (2.4 g)	0.035 oz (1 g)
Suggested applications	Yard Management Production Logistics RTI Management Long-Distance Shipping	RTI Management Transportation and Logistics Yard Management Construction Tools	RTI Management Production Logistics Yard Management Long-Distance Shipping	Supply Chain Management Warehouse Automation RTI Management Production Logistics Work-In-Process Inventory Fulfillment and Shipping	RTI Management Pallet Logistics Storage Rack Identification	Datacenters IT Asset Management Work-In-Process Inventory Automated Inventory	Global supply chain Logistics Datacenter servers E-commerce	MRO Tool Tracking IT Asset Management Military Asset & weapon Tracking

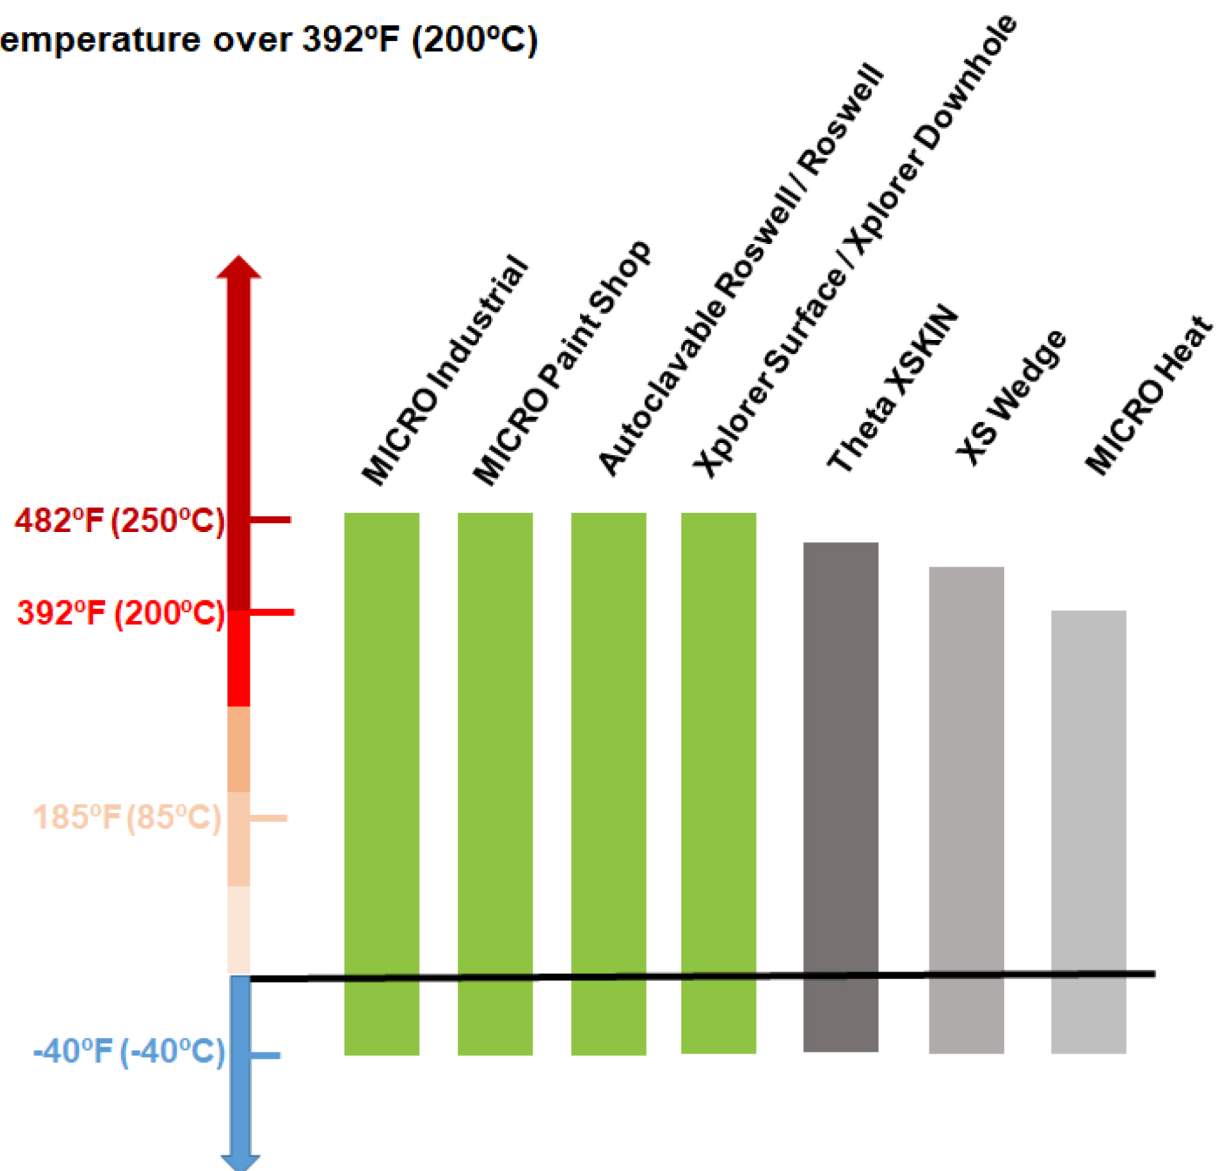
Product Guide

 Embeddable
  Global Frequency
  High Temp
  Autoclavable
  User Memory
  Long Range

Series	METAL SKIN series - printable labels				XSKIN series - off metal inlays		XENSE series - sensors
Product	 Mercury	 Delta	 Platinum	 Titanium	 Gamma	 Theta	 Temp Concrete
P/N	X51A0-US100-U9 (US) X51A0-EU100-U9 (EU)	X8020-US100-R6P (US) X8020-EU100-R6P (EU)	X50A3-US011-U9 (US) X50A3-EU011-U9 (EU)	X5220-US100-U9 (US) X5220-US100-U9 (EU)	X6101-GL011-F1 (Global)	X7101-GL100-H3 (Global)	X90A0-GL100-AS3211
Operating frequency	902-928 MHz (US) 865-868 MHz (EU)	902-928 MHz(US) 865-868MHz (EU)	902-928 MHz(US) 865-868MHz (EU)	902-928 MHz(US) 865-868MHz (EU)	860-960MHz(Global) 	860-960MHz(Global) 	840-940MHz (Global) 
IC type	NXP UCODE 9	Impinj Monza R6-P	NXP UCODE 9	NXP UCODE 9	Fujitsu MB97R8050	Alien Higgs-3	Asygn AS3211
Memory configuration	96 bits TID 96 bits EPC	48 bits TID 128/96 bits EPC 32/64 bits User Memory	96 bits TID 96 bits EPC	96 bits TID 96 bits EPC	176 bits TID 160 bits EPC	64 bits TID 96 bits EPC 512 bits User Memory 	48 bits TID 192 bits EPC 32 bits User Memory
Read range on metal (2W EIRP)	Up to 26 ft (8 m) 	Up to 16.4 ft (5 m)	Up to 16 ft (5 m)	Up to 8 ft (2.5 m)	Limited	Limited	Up to 6.6 ft (2m)
Read range off metal (2W EIRP)	Up to 19 ft (6 m)	Limited	Up to 6 ft (2 m)	Up to 3.3 ft (1 m)	Up to 9.8 ft (3 m)	Up to 29.5 ft (9 m) 	Up to 16.4 ft (4.5 m) in concrete Up to 9.8 ft (3 m)
Case material	N/A	N/A	N/A	N/A	N/A	N/A	Industry-Grade Polymer with metal inserts
Mounting system	High-performance adhesive	High-performance adhesive	High-performance adhesive	High-performance adhesive	High-performance adhesive	Embeddable, Injection molding, Compression molding 	Casting, Screws, Rivets (ø 3.2mm), Zip ties, Cable ties, High-performance adhesive (optional) 
Operating temperature	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +212°F (-40°C to +100°C)	-40°F to +253°F (-40°C to +125°C)
Application temperature	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +185°F (-40°C to +85°C)	-40°F to +446°F (-40°C to +230°C) 	-40°F to +253°F (-40°C to +125°C)
Compression strength	92 psi (634 kPa)	92 psi (634 kPa)	14 psi (97 kPa)	58 psi (400 kPa)	14 psi (97 kPa)	92 psi (634 kPa)	29 psi (200 kPa)
IP	IP68	IP57	IP68	IP68	IP54	IP68	IP68
Dimensions	4 x 1.5 x 0.04 in (101.6x 38 x 1.0 mm)	3.15 x 0.87 x 0.04 in (80 x 20 x 1.0 mm)	2.8 x 0.75 x 0.04 in (58.5 x 19 x 1 mm)	1.77 x 0.22 x 0.04 in (45 x 5.6 x 1 mm)	4.0 x 2.0 x 0.008 in (101.6 x 50.8 x 0.2 mm)	2.8 x 0.43 x 0.005 in (71 x 11 x 0.13 mm)	3.94 x 1.02 x 0.35 in (100 x 26 x 8.9 mm)
Weight	Reel: 1.98lbs (0.9kg)	Reel: 1.76 lbs (0.8 kg)	Reel: 1.32 lbs (0.6 kg)	Reel: 0.88 lbs (0.4 kg)	Reel: 2.54 lbs (1.15 kg)	0.007 oz (0.2 g)	0.68 oz (19.4 g)
Suggested applications	Warehouse Management RTI Management Manufacturing WIP Data Center Automation IT Assets Inventory Medical Supplies	Product authentication Supply chain management Foil-based packaging tracking IT asset management	Industrial Supply Chain RTI Management Warehouse Automation Automated Inventory	Product authentication IT asset and laptop tracking Radio and mobile equipment Foil-based packaging tracking	Healthcare devices and equipment Pharmaceutical & biotech processing equipment Food	Plastics Injection Molding RTI Management Automotive Components Hand Tools and Equipment Portable Power Equipment and Cables	Concrete Curing Infrastructure Monitoring Manufacturing Asset Tracking


Xerafy High Temperature RFID Tags And Inlay

Application temperature over 392°F (200°C)




Xerafy Long-Range RFID Tags And Label




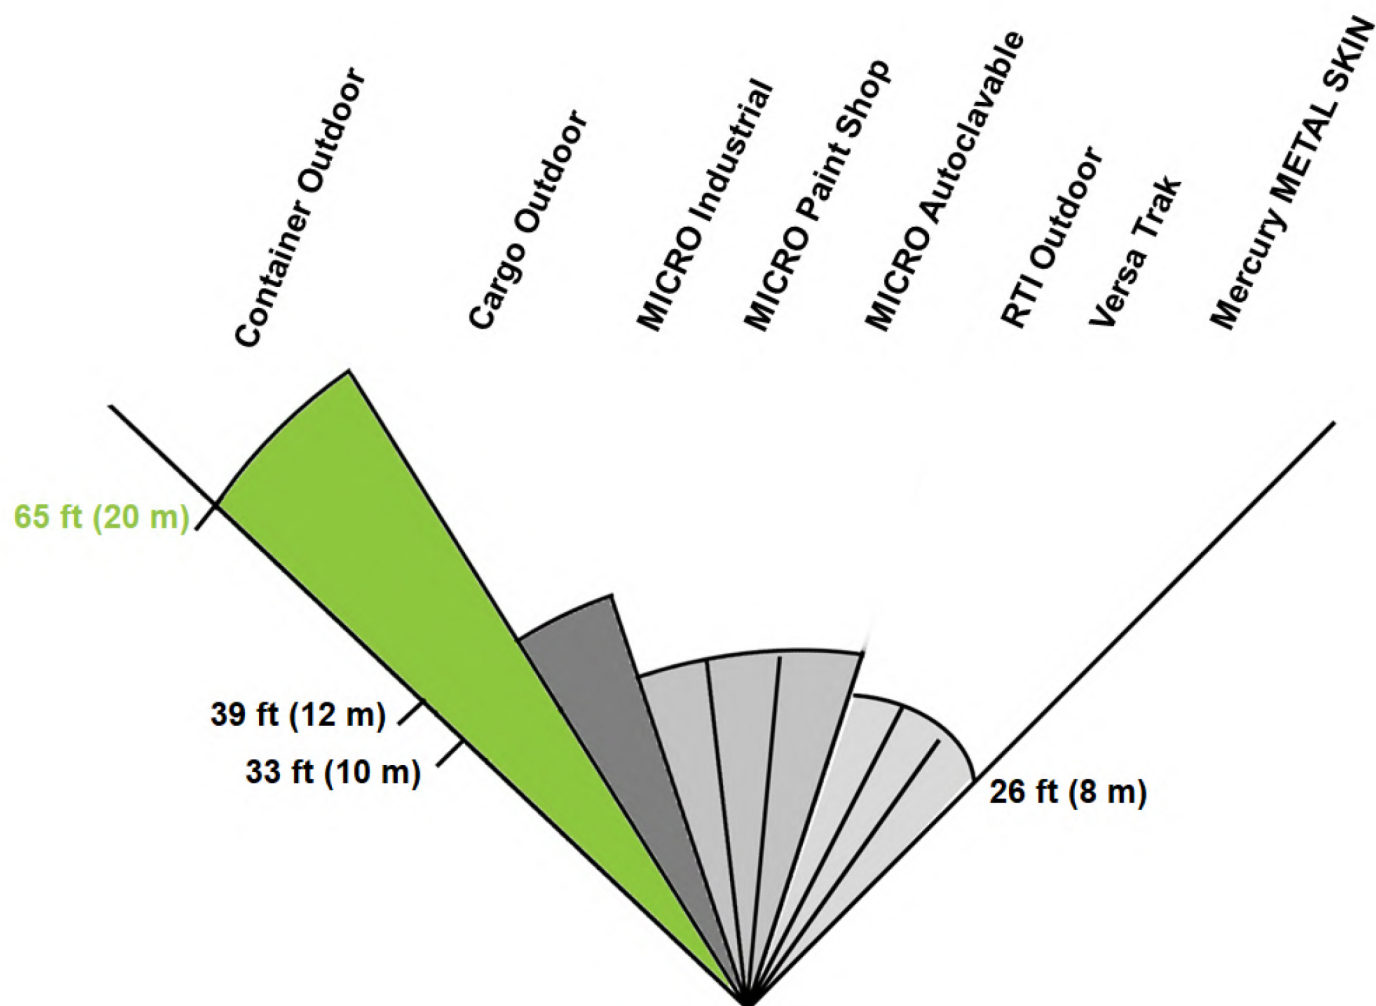
Read range is tested on metal with fixed reader (2W ERP)



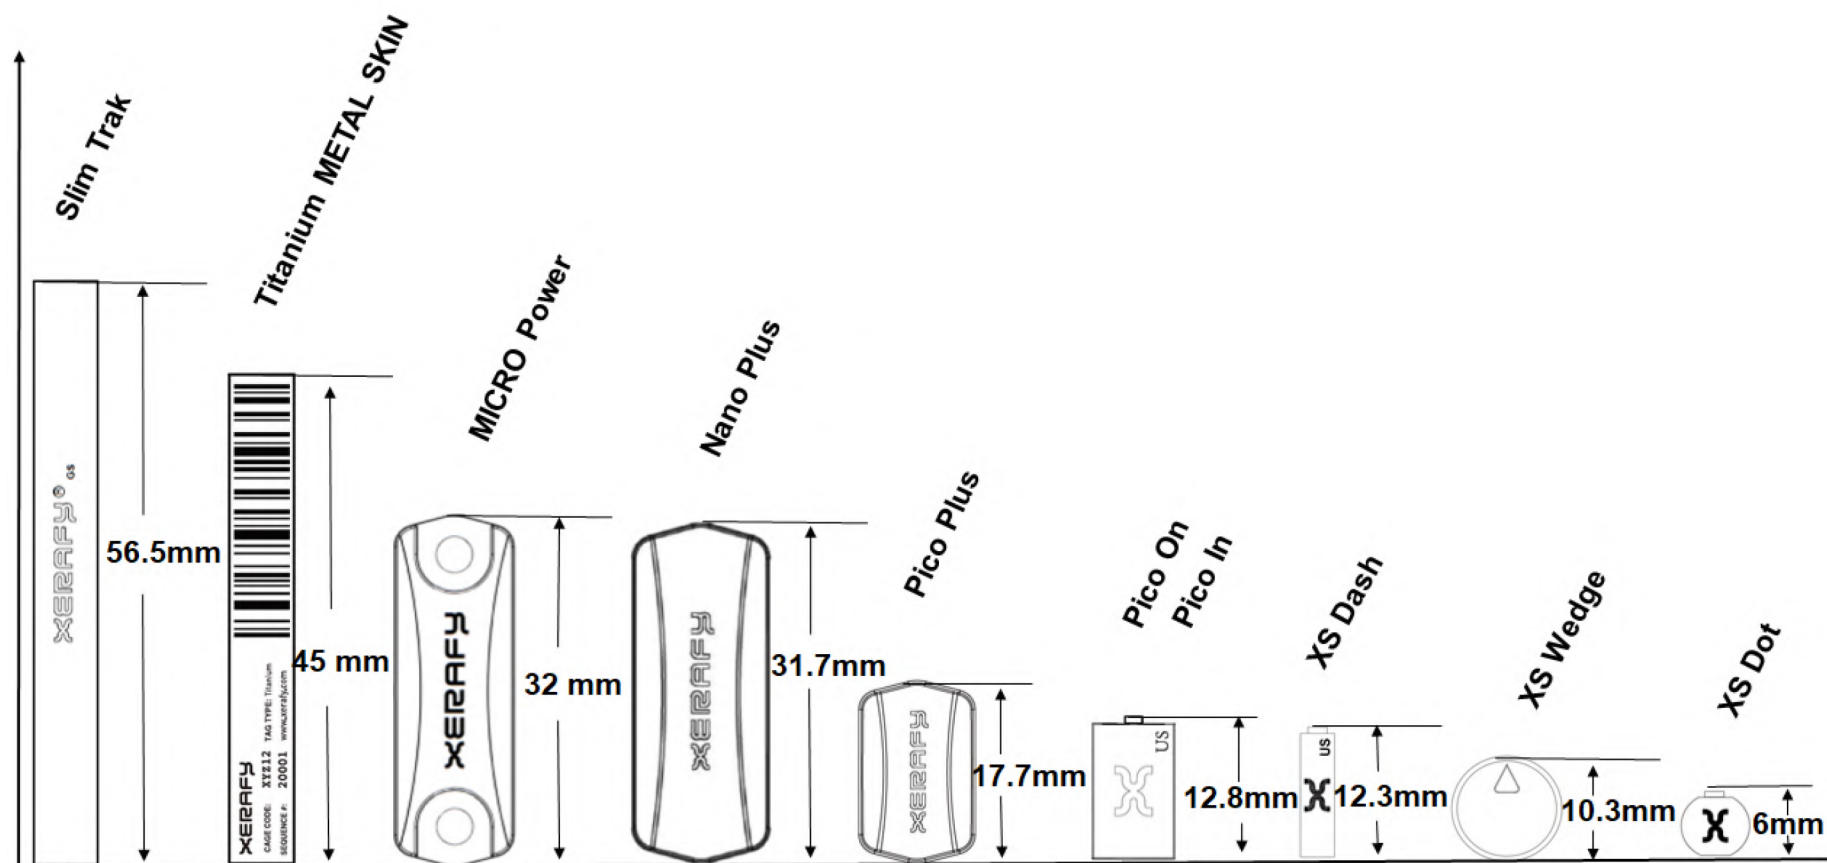Xerafy Small Footprint RFID Tags and Labels



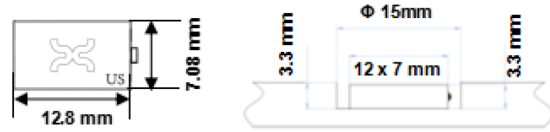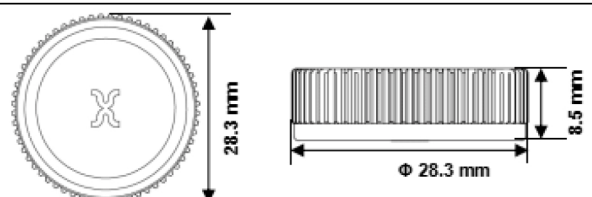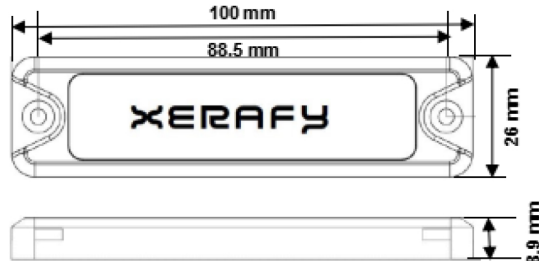Xerafy Embeddable RFID Tags, Inlays and Sensors

Products	Embedding Recommendations	Embedding Methods	Applicable Materials
XS Wedge 	1. Make a plane on the surface (Length $\geq$ 12 mm * Width $\geq$ 12 mm). 2. Drilling - Make a flat bottom groove on the metal surface 10 mm * 5 mm). 2. Position - Put $\frac{1}{2}$ of the XS Wedge into the groove and adjust the tag's direction according to the object size. 3. Insertion - Drive the remaining $\frac{1}{2}$ of the tag into the groove, using a hammer or similar tool.	Flush mounting Seal-in	Metal
Pico In 	Click to watch the instruction video.	Flush mounting Seal-in	Metal
Xplorer Downhole Xplorer Surface 	Click to watch the instruction video.	Flush mounting Seal-in	Metal
Theta XSKIN 	Designed to work with a wide range of thermoplastic resins and to be compatible with a large number of molding processes for temperatures of up to 230°C.	Injection molding Compression molding	Plastics
XENSE Temp Concrete 	Fix the tag to the metal rebars using cable ties and embedded in concrete.	Casting	Concrete Rebars Plaster