
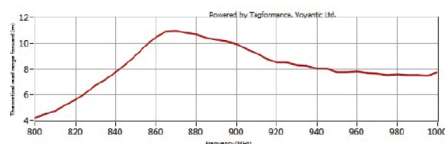


FLEX OUTDOOR

Technical Specifications

- **RF protocol** EPC Class1 Gen 2, ISO18000-6C
- **Frequency** 860-960 MHz (Global)
- **IC type (chip)**¹ Alien Higgs 3
- **Chip memory**² 96 bits EPC (Up to 480 bits); 64 bits TID; 512 bits user memory
- **Write cycles** 100,000 times
- **Read range fixed**³ Up to 7.50 m, off metal
- **Read range handheld**³ Up to 5 m, off metal
- **Polarization** Linear
- **Read range off metal**

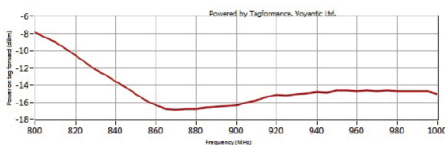

Key Features

- + **Flexible tag:** for curve surfaces
- + **Global freq:** worldwide compatibility
- + **7.5 m read range:** read from a distance
- + **IP68 rating:** waterproof

Applications

- **Transportation and logistics**
- **Yard management**
- **RTI inventory**

Environmental Specifications

Temperatures



- Operational -40°C to +85°C
- Survival -40°C to +100°C

Chemicals⁴



- 24h H₂SO₄ (10% sulfuric acid)
- 24h HNO₃ (10% nitric acid)
- 24h H₃PO₄ (20% phosphoric acid)
- 24h H₂O₂ (25% hydrogen peroxide)
- 24h NaOH (10% sodium hydroxide)

- **IP rating** IP68
- **Compression strength** 213 psi (1470 kPa)
- **Shock** 1 m to concrete/granite

- **Vibration** MIL-STD-810G
- **Warranty** 1 year

¹ The chip data retention is up to 50 years, based on chip operating under general environment conditions.

² EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.


³ Performance based on standard testing methodologies. Performance may vary depending on environmental factors and reader output power.

⁴ The chemical resistance is based on the concentration of solutions and application environment. Please contact Xerafy for further details on chemical resistance.



Physical Specifications

- **Material** High-Elasticity Polymer
- **Dimensions (in)** 3.54 x 0.71 x 0.16
- **Dimensions (mm)** 90 x 18 x 4, hole: 10x4
- **Weight** 0.28 oz (8 g)

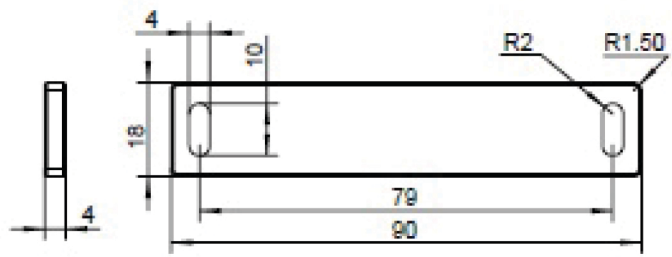

Mounting Systems

- Zip ties, Cable ties
- Industrial adhesive (optional)

Industry Compliance



Order Information

Flex OUTDOOR: X0370-GL100-H3

Customization Options

Encoding

ATEX Certified Version

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.



atlasRFIDstore
(205) 383-2244
sales@atlasRFIDstore.com
www.atlasRFIDstore.com

