



TEX 50x12

Technical Specifications

- **RF protocol** EPC global Class 1 Gen 2; ISO18000-6C
- **Frequency** 860-960 MHz (Global)

NXP

- **IC type** (chip)¹ NXP UCODE 9xe
- **Chip memory**² 128 bits EPC; 96 bits TID
- **Read range** fixed³ Up to 16.40 ft (5 m)
- **Read range** handheld³ Up to 13.12 ft (4 m)

Impinj

- **IC type** (chip)¹ Impinj M830
- **Chip memory**² 128 bits EPC; 96 bits TID
- **Read range** fixed³ Up to 19.69 ft (6 m)
- **Read range** handheld³ Up to 26.25 ft (4.80 m)

- **White cycles** 100,000 times
- **Polarization** Linear

Key Features

- + **Textile:** flexible and washable
- + **200+:** industrial washing cycles
- + **EECC certified:** quality assurance
- + **Cost-effective:** for high volume
- + **Printable:** texts, patterns and barcodes

Applications

- **Medical scrubs**
- **Hospital linens**
- **Hotel linens**
- **Uniforms**
- **Rental costumes**

Environmental Specifications

Temperatures



- Operational -20°C to +85°C
- Survival -20°C to +110°C
- Washing: 90°C (194°F), 15 minutes
- Pre-drying: 180°C (356°F), 30 minutes
- Ironing: 185°C (365°F), 10 seconds
- Sterilization process: 135°C (275°F), 20 minutes

Chemicals⁴



- Standard detergents, fabric softeners, bleach, oxygen/chlorine compounds, alkali substances, acetic and peracetic acid

- **Storage humidity** 8% - 95% RH
- **Mechanical resistance** 60 bars

- **Vibration** MIL-STD-810G
- **Warranty** 200 washing cycles or 3 years

¹ The chip data retention is up to 50 years, based on chip operating under general environment conditions.

² EPC can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.


³ Off metal, actual read range may vary based upon use case and antenna power.

⁴ The chemical resistance is based on the concentration of solutions and application environment. Please contact Xerafy for further details on chemical resistance.



Physical Specifications

- **Material** Textile
- **Dimensions (in)**¹ 1.97 x 0.47
- **Dimensions (mm)**¹ 50 x 12
- **Thickness (in)**¹ 0.03 in, sew
0.02 in, heat-seal
0.06 in on chip location
- **Thickness (mm)**¹
0.66 mm, 1.40 mm on chip location, sew
0.62 mm, 1.48 mm on chip location, heat-seal
- **Color** White
- **Weight** 0.30 g
- **Washing method** Laundry, dry cleaning

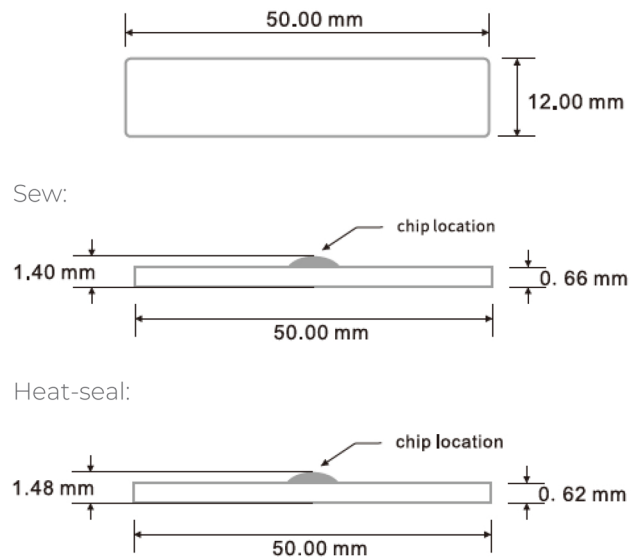

Mounting Systems

Sew or heat-seal based on specific requirements, with different product P/N selections

Installation Instructions

1. Install the tag by sewing:

Sew into a hem or inside a pocket of fabric

2. Install the tag by heat-sealing:

Seal the tag onto the textile at 215°C and 0.6-0.8 MPa for 15 seconds

¹ Tolerance: +/- 0.02; +/- 0.50

² Tolerance: H: +/- 0.004; H: +/- 0.100

Industry Compliance



Order Information

NXP	
TEX 50x12 (Sew): X5012-GL010-U9xe	TEX 50x12 (Heat-seal): X5012-GL011-U9xe
Impinj	
TEX 50x12 (Sew): X5012-GL010-M830	TEX 50x12 (Heat-seal): X5012-GL011-M830

Customization Options

Encoding	Laser Marking ¹
----------	----------------------------

¹ Since the barcode reading rate isn't 100% reliable, we do not recommend laser engraving barcodes on the heat-seal version. Please select the sew version instead.

The information provided by Xerafy Singapore Pte. Ltd. is for general information purposes only. All information on the datasheet is provided in good faith. However we make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability, or completeness of any information on the datasheet.

Under no circumstance shall we have any liability to you for any loss or damage of any kind incurred as a result of the use of the product or reliance on any information provided on the datasheet. Your use of the product and your reliance on any information on the datasheet is solely at your own risk.

