



ZEBRA

Z-Perform 1500T


FEATURES

- Thermal transfer, smooth paper label with a permanent acrylic adhesive
- Recommended for printing applications up to 14 inches per second
- Suitable for fanfolding
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (10017767RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White smooth topcoated paper	2.6 mil
Adhesive	Permanent, acrylic-based	0.6 mil
Liner	40 lb. semi-bleached, kraft stock	2.4 mil
TOTAL ± 10%		5.6 mil

ADHESIVE STRENGTH

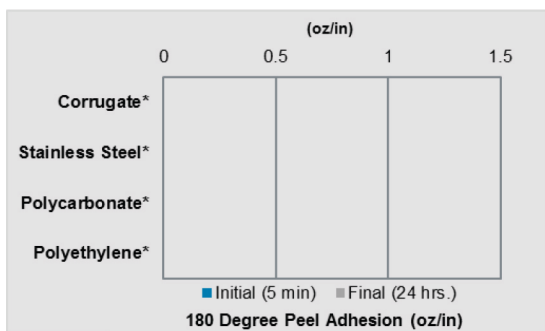

*Attraction between adhesive and surface is so great that the facestock rips.

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
25° F (-4° C)	0° F to 180° F (-18° C to 82° C)	72° F (22° C) at 50% RH

Expected Exterior Life

Not recommended for outdoor use

CHEMICAL RESISTANCE

		Suggested Ribbon		
		6000	2000	6100
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	NR	NR	NR
	Ammonia	NR	NR	NR
	Bleach	NR	NR	NR
	IPA	NR	NR	NR
Harsh	Gasoline	NR	NR	NR
	Grease	NR	NR	NR
	Oil	NR	NR	NR
Extreme	Acetone	NR	NR	NR
	IR Reflow	NR	NR	NR
	MEK	NR	NR	NR
	TCE	NR	NR	NR
	Xylene	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Labeling of packaging material



- Compliance labeling



- Work in process



- Food labeling



Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.


NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com

©2016 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. 09/2016

BoingTech™ BT793 RFID Inlay

General Purpose Zebra-Certified RFID inlay

RFID inlays are critical to achieve the real-time visibility needed to streamline operations, minimize errors in asset-related data, as well as track, identify and maximize asset utilization. Zebra Certified Inlays deliver excellent performance, so you can rest assured that they will efficiently and effectively encode and read, leading to a higher application ROI, and best in-class user experience. The general purpose BoingTech BT793 inlay is well suited for Retail item level tracking applications, but can be utilized in a wide range of applications outside Retail. Tested for optimal performance with Zebra printers and RFID readers, the BoingTech BT793 inlay enables you to maximize the benefits of RFID for the identification small items.

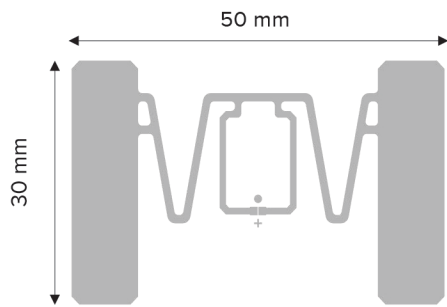

Designed for Retail featuring long read ranges

Boasting read ranges of up to 20m, the BoingTech BT793 was designed for Retail item level tracking applications and meets Auburn ARC specifications. It can also be used in a wide range of applications outside of Retail, where this inlay's size and longer read range offers the best return on investment.

Zebra Certified for consistently exceptional performance

Zebra Certified Inlays have been pre-tested to ensure industry-leading performance and low instance of printer voids. Read range performance has been characterized on multiple surface types using industry standard Voyantic Tagformance test equipment. They feature the best-performing chips to support a variety of application requirements. The inlay position has been tested in Zebra industrial, desktop and mobile printers to ensure reliable encoding. Zebra is ISO 9001 certified and uses quality processes to reduce instances of unsuccessful encoding. And, we use the same thermal material from order-to-order to safeguard print consistency and quality.

Unmatched expertise in RFID

Zebra is your trusted expert in all things RFID. We offer end-to-end RFID solutions – including pre-tested RFID supplies made with the right materials and adhesives, along with the highest-performing inlays and chips – customized for your application. We have played a central role in pioneering RFID technologies and defining global standards since the mid-1990's, when smart-label technology first appeared. We were recognized as the #1 RFID brand by the 2018 RFID Journal's Brand Report. And we hold more than 575 RFID patents and numerous industry firsts in RFID.

Zebra ZipShip — on the shelf and ready to ship

Need an RFID on-metal labeling solution in a hurry? This inlay is in-stock and ready for immediate dispatch as part of our ZipShip program. You get fast shipment and the minimum order is just one box.

Enable efficient tracking of your assets with the BoingTech BT793.

Specifications

Technical Information	
Chip	NXP® UCODE® 9
EPC memory	96-bit
User memory	N/A
TID	96 bit factory locked (48 bit unique)
Read Sensitivity	-23 dBm
Write Sensitivity	-21 dBm
RFID Standards	EPC Gen2v2
Read Range	Up to 20 m in free space

Theoretical Read Range: ETSI (865-868 MHz)*

Air	8 m
Cardboard	14 m
Fiberglass	8 m
Glass	8 m
PTFE	20 m
Polyacetyl	11 m
PVC	13 m
PP	20 m
Rubber	8 m

Theoretical Read Range: FCC (902-928 MHz)*

Air	16 m
Cardboard	12 m
Fiberglass	10 m
Glass	14 m
PTFE	12 m
Polyacetyl	8 m
PVC	9 m
PP	13 m
Rubber	14 m

Material Testing in End Application

The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.


Product Performance & Suitability	
Storage Temperature	-55°C/+125°C
Operating Temperature	-40°F to 158°F (-40 to 70°C)

Footnotes

*Theoretical read range data is meant to be directional. Actual performance will depend on your application and environment. Testing is recommended.

Radiation Pattern

**Read range drops to 25% of maximum when inlay is perpendicular (90° and 270°) to the reading antenna. To learn more about Radiation Pattern visit zebra.com/rfidlabels

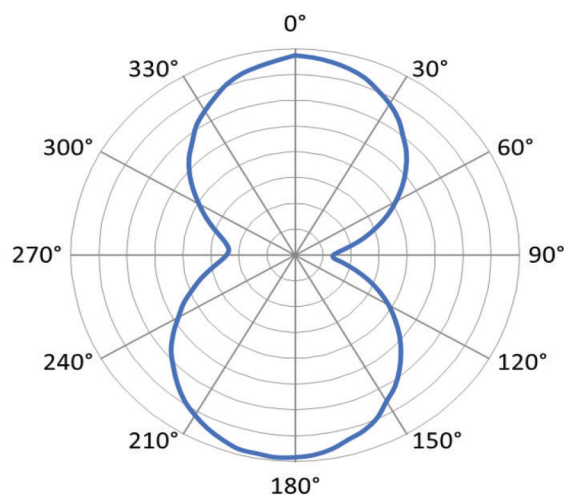

Markets and Applications

Warehousing

- Work-in process

Retail

- Item level labeling

Healthcare

- Asset labeling

Government

- Asset labeling

Manufacturing

- Component labeling



ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2021 Zebra Technologies Corp. and/or its affiliates. 09/23/2021.