



Z-Perform 2000T


FEATURES

- Thermal transfer, smooth, paper label with a permanent acrylic adhesive
- Recommended for printing applications up to 14 inches per second
- Topcoating is suitable for fanfolding
- Meets FDA 175.105 for indirect food contact requirements
- Available in white (66105RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White smooth topcoated paper	2.5 mil
Adhesive	Permanent, acrylic-based	0.5 mil
Liner	40 lb. semi-bleached, kraft stock	3.0 mil
TOTAL ± 10%		6.0 mil

ADHESIVE STRENGTH

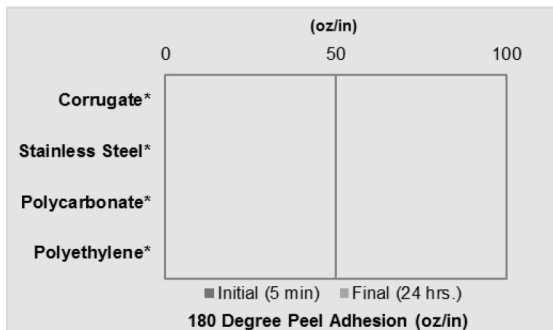

*Attraction between adhesive and surface is so great that the facestock rips.

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
30°F (-1°C)	-65°F to 200°F (-54°C to 93°C)	72° F (22° C) at 50% RH

Expected Exterior Life

Not recommended for outdoor use

CHEMICAL RESISTANCE

		Suggested Ribbon		
Chemical		6000	2000	6100
Weak	Blood	●	●	●
	Body Fluid	●	●	●
	Salt Water	●	●	●
	Water	●	●	●
	Window Cleaner	●	●	●
Moderate	Alcohol	NR	NR	NR
	Ammonia	NR	NR	NR
	Bleach	NR	NR	NR
	IPA	NR	NR	NR
Harsh	Gasoline	NR	NR	NR
	Grease	NR	NR	NR
	Oil	NR	NR	NR
Extreme	Acetone	NR	NR	NR
	IR Reflow	NR	NR	NR
	MEK	NR	NR	NR
	TCE	NR	NR	NR
	Xylene	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- Package Labeling including corrugate, plastic, and metal



- Compliance labeling



- Food labeling



- Work in process labeling



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.

©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.



atlasRFIDstore

(205) 383-2244

sales@atlasRFIDstore.com

www.atlasRFIDstore.com