

Product Specification



SI-SPK-43A-01.1

Page 1 of 4

Smart Label Inlay

HF Inlay H142 TiPIs 22.5x38

Features

- ISO/IEC 15693-2, -3; ISO/IEC 18000-3 Compliant
- 13.56-MHz Operating Frequency
- 2048-Bit User Memory in 64 blocks × 32-Bit
- User Lock Per Block
- Application Family Identifier (AFI)
- Data Storage Format Identifier (DSFID)

Applications

- Product Authentication
- Library
- Supply-Chain Management
- Asset Management
- Ticketing/Stored Value

Description

SMARTRAC transponder inlays consist of 13.56-MHz high-frequency (HF) transponders that are compliant with the ISO/IEC 15693 and ISO/IEC 18000-3 global open standards. These products offer a user-accessible memory of 2048 bits, organized in 64 blocks.

The SMARTRAC transponder inlays are well suited for a variety of applications including, but not limited to, product authentication, library, supply-chain management, and ticketing/stored value applications.

This inlay is considered to replace TI-inlay
RI-I03-112A-03 Tag-it(TM) HF-I Plus Transponder Inlays Miniature Rectangle

with the following technical parameters as described below.

Pin Configuration and Functions

According to IC specification: Tag-it HF-I Plus Transponder IC (TMS37112)

Go/NoGo-Test

All inlays are tested inline in the machine by a Go/NoGo-Test. There is no functional test of the whole memory of the chip applied. All inlays, who fail the Go/NoGo-Test will be marked with a black inkdot as shown on the last page.

Product Specification



SI-SPK-43A-01.1

Page 2 of 4

Smart Label Inlay

HF Inlay H142 TiPIs 22.5x38

Specifications

	PART NUMBER
	HF Inlay H142 TiPIs 22.5x38
Integrated Circuit (IC)	Tag-it™ HF-I Transponder IC TMS37112
Supported standard	ISO/IEC 15693-2, -3; ISO/IEC 18000-3
Recommended operation frequency	13,56 MHz
Passive resonance frequency (at 25°C)	13,9 MHz ± 0,4 MHz
Factory-programmed read-only number	64 bits
Memory (user programmable)	2k bits organized in 64 blocks × 32-Bit
Typical programming cycles (at 25°C)	100,000
Data retention time (at 55°C)	>10 years
Simultaneous identification of tags	Up to 50 tags per second (reader/antenna dependent)
Antenna size	22,5 mm × 38 mm (~0,89 in × ~ 1,5 in)
Foil width	48 mm ± 0,5 mm (1,89 in ± 0,02 in)
Foil pitch	48 mm ± 0,2 mm (1,89 in ± 0,0079 in)
Thickness	Chip area: 0,343 mm ± 0,1 Antenna area (Al both sides): 0,078 mm ± 0,01 Antenna area (Al one side): 0,068 mm ± 0,008
Base material	Substrate: PET (polyethyleneterephthalate); Antenna: aluminium
Smallest bending radius allowed	18 mm (~ 0,71 in)
Bending diameter	≥ 50mm, tension less then 10N
Operating temperature	–20°C to 70°C
Storage temperature (single inlay)	–40°C to 85°C (warpage may occur at upper temperature range)
Storage temperature (on reel)	–40°C to 40°C
Shear Force on Chip	≥ 2,8 N
Delivery	Single-row tape wound on cardboard reel with 340-mm diameter Reel outer width: approximately 70 mm (about 2,75 in) Reel inner width: approximately 60 mm (about 2,36 in) Hub diameter: 76,2 mm (3 in)
Typical quantity of good units per reel	5000 Inlay roll contains No chipless leader and trailer. Rolls start and end with functional inlays

Electrostatic Discharge Caution

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

A high current density of an electrostatic discharge from the foil can damage the chip (IC). Therefore, it is recommended to use ionizer or antistatic rollers in the manufacturing process. Any conductive parts in touch with Tag-it HF-I Plus Inlays should have a high-impedance discharge to ground. We recommend approximately 1 MΩ to avoid ESD damage.

Product Specification

SI-SPK-43A-01.1

Page 3 of 4

Smart Label Inlay

HF Inlay H142 TiPIs 22.5x38

Packaging and Label

The products are packed very carefully in order to protect them from moisture absorption, ESD impact and damages during their handling, storage and transportation.

Single-row tape with cardboard reel



Label Position




Package in ESD foil



Cardboard Packing Box



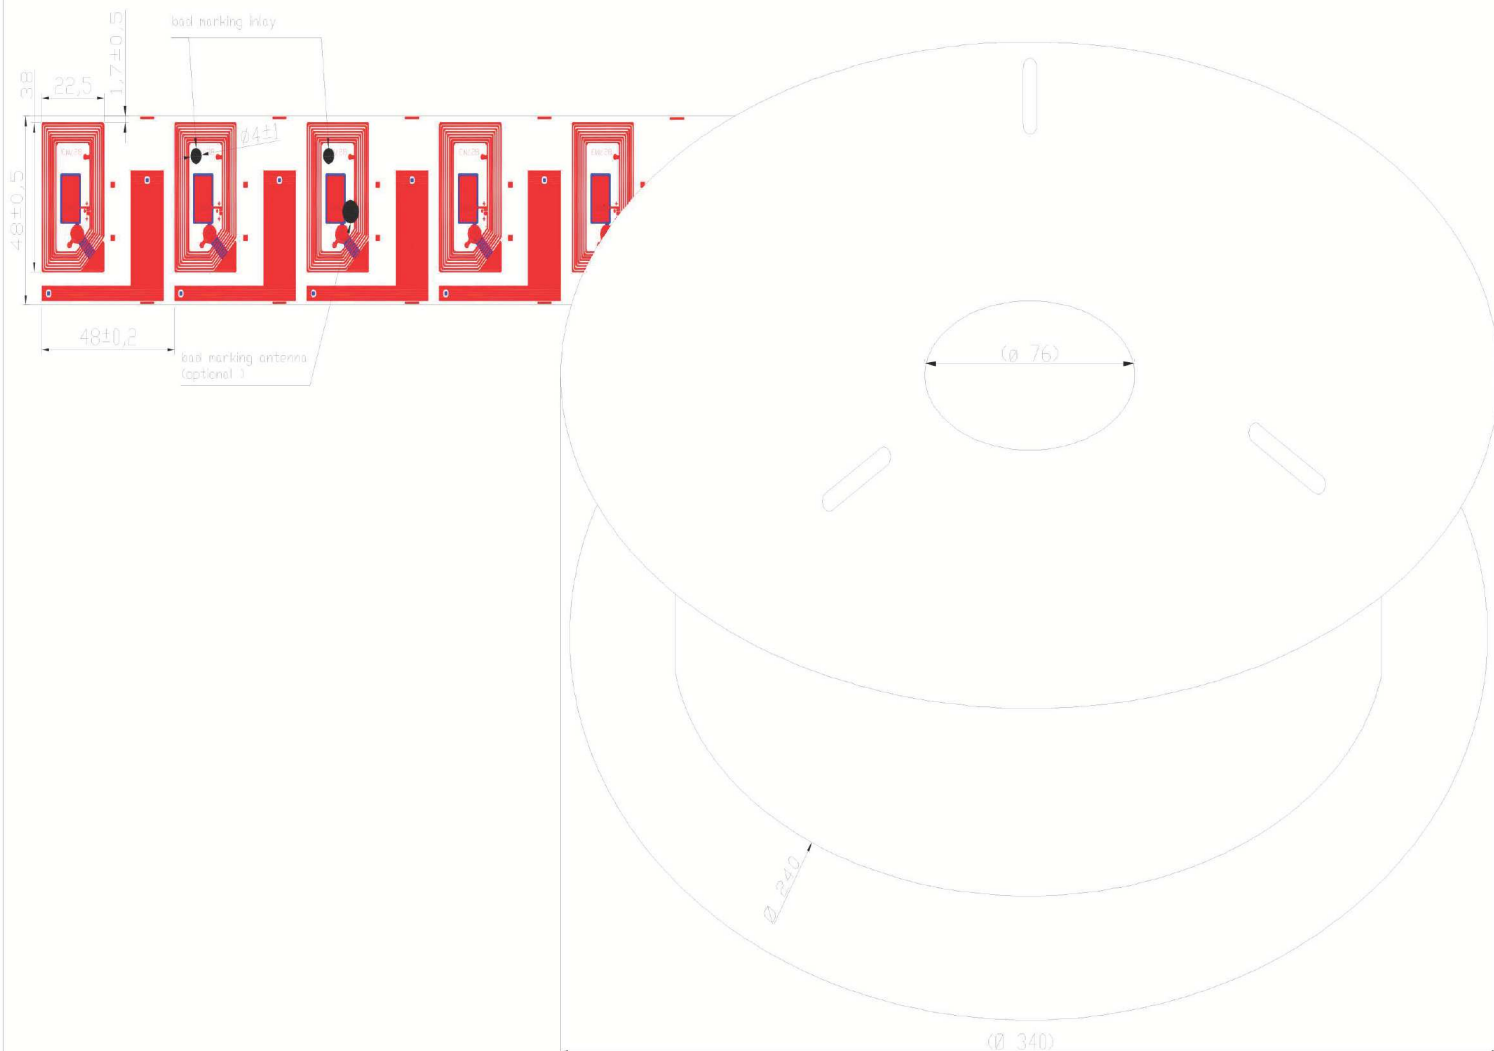

atlasRFIDstore.com

1.888.238.1155 • Inside USA

1.205.383.2244 • Outside USA

info@atlasRFIDstore.com • www.atlasRFIDstore.com

- Strictly Confidential -

Proprietary Information. Do not reproduce, distribute or disclose. No unauthorised use.

© 2015 | SMARTTRAC TECHNOLOGY GmbH | Dresden | Germany

application area				allowance	surface	scale	1:1	mass
				tolerance ± 0.2		material, semifinished part 30µm Al (top) / Adh. / 38µm Pet / Adh. / 10µm Al (paste)		
				date	name	description		
				Drawn	R. Henschel	FLR827M3 H142		
				Checked	L. Klemm	delivery form		
				Confirmed	C. Schön	Ø240mm cone		
				drawing number				page
				P287-15.213.020-V01.2				1/1
V01.2	change card	02.12.15	henschel					51
V01.1	initial release	15.01.15	henschel					
status	changes	date	name	SMARTTRAC TECHNOLOGY GmbH				