

RuggedJet™ 2 Series

2 Inch Receipt & Label Mobile Printer



Receipts
RJ-2050
RJ-2030






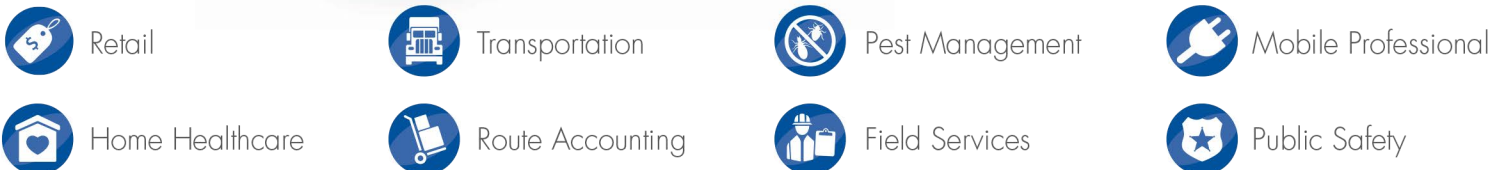
Labels, Tags,
and Receipts
RJ-2140
RJ-2150

Compact. Rugged. Connected.

Fast, compact, rugged and ready to connect to virtually any device. RuggedJet™ 2 series raises the bar in mobile printing performance, ruggedness, operating system compatibility and total cost of ownership

- Fast. Prints at 6 inches per second
- Rugged. IP54 certified, 8.2 foot drop tested, and tumble tested for long-term durability
- Versatile. Compatible with Android™, iOS®, and Windows® and available with dual wireless radio for Bluetooth® or WiFi support
- Advanced. First in 2" class to be Apple AirPrint® compatible and new REMOTE UPDATE feature to automatically update printer settings while in the field and actively in use
- Reliable. Covered by the Brother Assure outstanding two-year Premier warranty

	 Bluetooth	 MFi	 WiFi
RJ-2150	✓	✓	✓
RJ-2140	✓	✓	✓
RJ-2050	✓	✓	✓
RJ-2030	✓		



brother
at your side

Technical Specifications for the RuggedJet 2

Model	RJ2030	RJ2050	RJ2140	RJ2150
Print Technology	Direct Thermal			
Print Resolution	203 dpi			
Maximum Print Speed	6 ips (152 mm/ sec)			
Type of Brother Media Supported	Receipt, Label, and Tag (Labels and tags require a black mark)		Receipt, Label, Tag Label	
User Interface	1 LED; 3 double function buttons, Monochrome LCD 2.4"/ 320x120 dot with back light			
Dimension (WxHxD)	122 mm (4.8")W x 57 mm(2.2")H x 100 mm(3.9")L		150 mm (5.9")W x 73 mm (2.8")H x 100 mm(3.9")L	
Weight	355g [0.78 lbs.] without battery 465g (1.02 lbs) with battery		435g [.96 lbs.] without battery 545g (1.20 lbs) with battery	
Print Width (Max)	54 mm			
Print Length (Min/Max)	12.7 mm; 1 m			
Roll Diameter (Max)	40mm (1.57")		60mm (2.63")	
Roll Width	Fixed Wall 2.16"(55mm) or 2.28"(58mm) Must remove insert for wider width		Adjustable 1.0"(25mm) to 2.28"(58mm)	
Memory	32MB RAM; 32MB Flash (12MB Available)			
USB Interface	USB Ver. 2.0 (full speed), mini B. No USB Host			
Bluetooth	Bluetooth2.1+EDR		No	Bluetooth2.1+EDR
Bluetooth MFI	No	Yes	No	Yes
WLAN	N/ A	Wireless LAN IEEE802.11b/ g/ n (Infrastructure mode and Adhoc mode: [b/ g/ n] / Wireless direct mode:[g/ n])		
WLAN Security	N/ A	AdHoc Mode: Open system (None/ WEP) Infrastructure Mode: Open system (None/ WEP64/ WEP128), Common key authentication (WEP), WPA/ WPA2-PSK (TKIP+AES), LEAP (CKIP), EAP-FAST (TKIP/ AES), PEAP (TKIP/ AES) * 3, EAP-TLS (TKIP/ AES), EAP-TTLS (TKIP/ AES) Wireless Direct Mode: WPA2-PSK (AES)		
Drop Protection	2.5m Multiple drop (under controlled test environment)			
Sealing Certification	IP54 without case			
Operating Temperatures	Operate: -10° to 50°C (with charge: 0° to 40° C)			
Supported Printer Driver	Microsoft®, Windows® Vista®, Windows® 7 / Windows® 8 Windows® 8.1 / Windows® 10			
SDK	Android™ 4.0.3 or later; iOS® 6 and above; Windows® Mobile			
Supported Command Language	Raster, ESC/ P, P-Touch Template, ZPLII emulation, CPCL emulation			
Barcode Symbolologies	CODE39; ITF(I-2/ 5); EAN-13; EAN-8; UPC-A; UPC-E; CODABAR; CODE128; GS1-128(UCC/ EAN-128); RSS symbols CODE93; POSTNET; UPC/ EAN EXTENSION; MSI; QR Code (model 1, model 2, micro QR); PDF417 (Standard, Truncate, MicroPDF417); Data Matrix(ECC200 Square, ECC200 Rectangular); MaxiCode; Aztec			
Internal Fonts and Sizes	<ESC/ P>; Bitmap font: Gothic, Letter Gothic Bold, Helsinki 3 size<16, 24, 32dot>; Outline font: Gothic, Letter Gothic Bold, Helsinki Max: 400dot; <P-Touch® Template>			
Power (Battery / Charger)	Rechargeable Li-ion battery: 7.2VDC; AC adapter (15 V) only for charging (50/ 60Hz); Cigarette car adapter or Wired type (12 VDC) only for charging			
Package Contents	Printer, Belt Clip, Li-ion battery			
Warranty	2 year Premier Warranty. For extended warranty go to www.BrotherAssureServiceProgram.com			



Brother is a trademark or registered trademark of Brother Industries, Ltd. in the United States.
All other trademarks and registered trademarks are the properties of their respective companies.
© 2016 Brother Mobile Solutions, Inc. 11030 Circle Point Drive, Suite 100, Westminster, CO 80020



atlasRFIDstore

(205) 383-2244

sales@atlasRFIDstore.com

www.atlasRFIDstore.com