

CCRR BUHRER 94x28 STICKER LABEL CCRR[®]

RFID
v1.0

Product Specification


SKU: AN892N103

Operating frequency	860-960 MHz
Air interface protocol	RAIN RFID / ISO 18000-63 and EPCglobal Gen2

IC - Integrated Circuit

Model	Impinj Monza 750
TID	96 bits of Serialized TID with 48-bit serial number
EPC	96 bits
User	32 bits
Reserved	32 bits Access Password, 32 bits Kill Password (chip configuration)
Data Retention	10 years
Programming Cycles	10,000 cycle endurance
Read Sensitivity	- 24 dBm
Write Sensitivity	- 21 dBm


Mechanical Specification

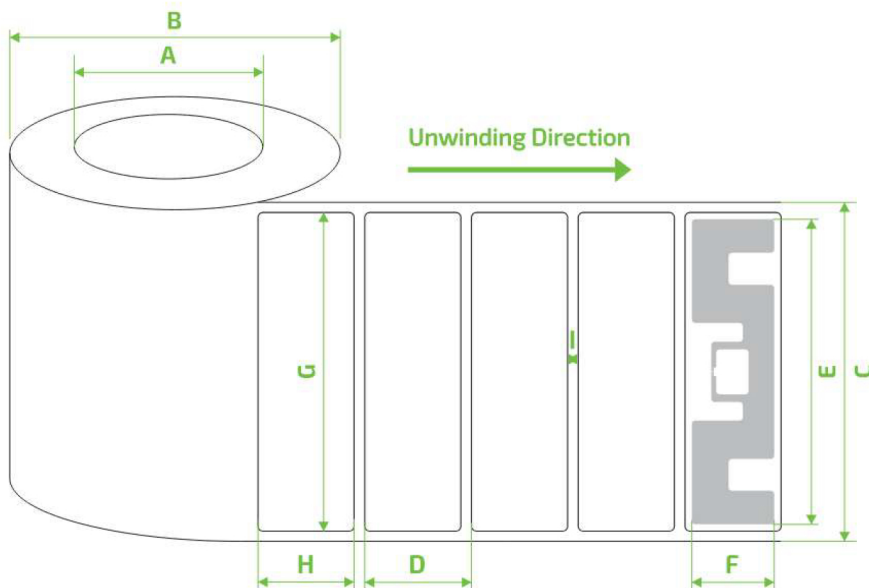

Dimension	Item	Metric [mm]	Tolerance [mm]	US [in]
A	Core inner diameter	76.2	2	3
B	Roll max outer diameter (\leq)	203.2	5	8
C	Web width	100	1	3.94
D	Pitch length per piece (MD)	31.115	0.5	1.225
E	Antenna width	90	0.2	3.54
F	Antenna height	24	0.5	0.94
G	Die-cut width	94	0.5	3.70
H	Die-cut height	28	0.5	1.10
I	GAP	3.115	1	0.123
	Register Mark	NA*	--	NA*

* Not applicable.

Product Structure

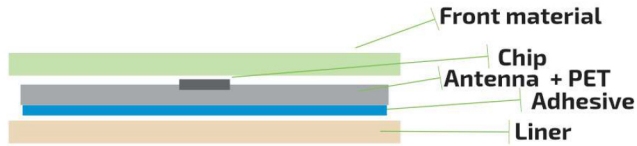

Front material	BOPP
Back Material	Liner, 60 g/m ²
Antenna material	Aluminum 10 μm on a PET 50μm substrate
Adhesive	Functional Permanent PSA Acrilyc (ADC1200)
Min. labelling temperature	-10 °C
Service temperature	-10 to 80 °C (maximum related to the top high temperature of the adhesive)
Peel min.	3 N / 25 mm (FTM 2)
Total Thickness	213 μm (± 13 μm)

Characteristics

Max. consecutive faulty tags	3
IC operating temperature	-40 °C to 85°C, 50 % RH
Shelf life	1 year (from manufacturing date)
Storage	23 °C ±3 °C / 50% RH ± 5%
ESD voltage immunity	2 kV peak HBM (Human Body Model)
Bending diameter	> 50 mm, tension less than 10 N

Packaging

Qty per Roll	4,000
Roll Net Weight ≈	3 kg - 6.61 lbs
Box	240 x 240 x 120 mm
Master Box	NA*

* Not applicable.