


## Power Cord, C14 to C21 - Heavy-Duty, 15A, 250V, 14 AWG, 2 ft. (0.6 m), Blue

MODEL NUMBER: P037-002-ABL

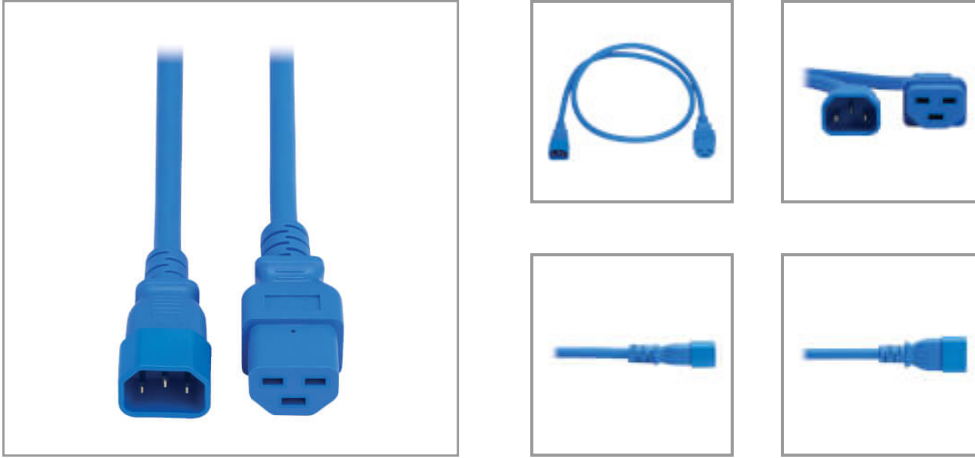

C14 to C21 15A heavy-duty cable connects high-output devices with C13/C22 power connectors commonly found on high-powered IT equipment.

### Features

#### 15A C14-to-C21 Power Cable for Network Devices That Require a Heavy-Gauge Connection

This heavy-duty cord features 14 AWG wire suitable for high power connections, making it a reliable solution for large server applications that require a higher-rated, heavier-gauge cable, including AI/machine-learning data centers. The two-foot (0.6-meter) length helps reduce cable clutter by providing a tailor-made fit between the device and the PDU or UPS in a crowded rack enclosure.

#### Recommended for High-Temperature Environments

The P037-002-ABL can be used to connect a blade server, large router or network switch with a C22 inlet, usually found on high-powered, high-temperature (overall operating temperature maximum 105°C/221°F) equipment, to a PDU or UPS system. It's an ideal upgrade to a power cord with improved temperature threshold for data center applications in which temperature control and fire safety are high priorities.

#### Blue Jacket Helps Avoid Misidentification That Can Cause Costly Downtime

The UL-listed cable has a blue PVC jacket with fully molded blue ends, which is easy to identify quickly in a crowded PDU or UPS system and helps prevent the cable from becoming accidentally disconnected.

### Highlights

- Recommended for powering switches, servers and other high-powered network devices
- 15A C21/C14 connectors support temperatures up to 221°F (105°C) frequent in rack enclosures
- Thick 14 AWG wire manages high power levels required for larger equipment
- 2 ft. length allows flexibility in mounting devices in a rack while avoiding cable clutter
- Blue cable jacket allows quick identification of devices in a crowded rack enclosure

### Package Includes

P037-002-ABL Power Cord, C14 to C21, 2 ft. (0.6 m), Blue

## Specifications

OVERVIEW	
UPC Code	037332293206
Device Compatibility	Computer; Server; UPS; PDU
Country/Region	North America
INPUT	
Maximum Input Amps	15
Voltage Compatibility (VAC)	250



Powering Business Worldwide

TRIPP LITE  
SERIES

CONNECTIONS	
Side A - Connector 1	IEC-320-C14
Side B - Connector 1	IEC-320-C21
PHYSICAL	
Plug Color	Blue
Cable Jacket Color	Blue
Cable Jacket Material	PVC
Cable Jacket Rating	FT2; VW-1
Power Cord Jacket Type	SJT
Cable Outer Diameter (OD)	11mm
Number of Conductors	3
Wire Gauge (AWG)	12
Wire Gauge (OD - mm <sup>2</sup> )	3.31
Cable Length (ft.)	2
Cable Length (m)	0.61
Cable Length (in.)	24
Shipping Dimensions (hwd / in.)	12.80 x 8.86 x 0.50
Shipping Dimensions (hwd / cm)	32.51 x 22.50 x 1.27
Shipping Weight (lbs.)	0.62
Shipping Weight (kg)	0.28
Unit Dimensions (hwd / in.)	12.800 x 8.900 x 0.500
ENVIRONMENTAL	
Operating Temperature Range	-4° to 221°F (-20° to 105°C)
Storage Temperature Range	-4° to 221°F (-20° to 105°C)
Operating Humidity Range	10% TO 65% RH, NON-CONDENSING
Storage Humidity Range	10% TO 65% RH, NON-CONDENSING
FEATURES & SPECIFICATIONS	
Antibacterial	No
Angled Plug	No
High Voltage	Yes
Locking Plug	No
Coiled Power Cord	No
STANDARDS & COMPLIANCE	



Powering Business Worldwide

TRIPP LITE  
SERIES

Product Certifications	cUL Listed; UL Listed
Product Compliance	WEEE
<b>WARRANTY &amp; SUPPORT</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2026 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.